



2026 FORD RV & TRAILER TOWING GUIDE

When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Tow More. Haul More. Built Ford Tough.®

2026 FORD TOWING GUIDE CONTENTS

TOWING BASICS

- 3 Know Before You Tow
- 4 Trailer Classes/Types
- 5 Hitch Styles
- 6 Weight Limits
- 8 Calculate Weight Distribution
- 9 Basic Towing Information
- 10 Towing Accessories

F-SERIES PERFORMANCE

- 12 F-150® Performance
- 13 Super Duty® Performance

PICKUP TRUCKS – TRAILER TOWING SELECTOR

- 15 F-150 Pickups
- 20 F-250®/F-350®/F-450® Super Duty Pickups
- 25 Super Duty Slide-In Camper Combination
- 27 Ranger®
- 28 Maverick®

COMMERCIAL VEHICLES – TRAILER TOWING SELECTOR

- 30 F-350/F-450/F-550®/F-600®
Super Duty Chassis Cabs
- 33 Medium Duty Truck
- 34 Transit® Vans, Cutaway/Chassis Cab
- 36 E-Series® Cutaway/Stripped Chassis

SUVS AND MUSTANG – TRAILER TOWING SELECTOR

- 38 Expedition®
- 39 Explorer®
- 40 Bronco®
- 41 Bronco Sport®
- 42 Escape®
- 43 Mustang®

MOTORHOMES AND STRIPPED CHASSIS – TRAILER TOWING SELECTOR

- 44 Class A Motorhome Chassis
- 45 Commercial Stripped Chassis
- 46 E-Series Class C Motorhome Chassis
- 47 Transit Class C Motorhome Chassis

TOWING A FORD VEHICLE

- 48 Four-Wheel-Down Towing
- 49 Tow-Dolly Flexibility

The following vehicles are not recommended for trailer towing: E-Transit™ and Mustang Mach-E®.

The 2026 F-Series® have an advanced, torque-rich powertrain lineup, delivering impressive payload and trailer tow ratings, across all models. Whether looking to carry a serious payload or tow the heaviest of trailers, F-Series trucks are designed to help tackle the toughest jobs.

F-Series – the best-selling truck in America for the 48th consecutive year*, brings decades of impressive RV and towing experience for every configuration!



2026 F-150 Platinum SuperCrew® with optional equipment in extra-cost color Ruby Red Metallic Tinted Clearcoat.

When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

*Based on 1977–2024 CY industry-reported total sales.

SAE Towing Standard

The Society of Automotive Engineers (SAE) testing standard J2807® defines procedures and requirements to determine gross combined weight ratings (GCWR) and to calculate the trailer weight rating (TWR) for any tow vehicle. This standard establishes minimum performance conditions to allow for consistent comparisons between similar class vehicles. Ford will apply the SAE standard to all vehicles.

TOWING BASICS



F-150® Tremor® SuperCrew® in extra-cost color Antimatter Blue Metallic.

When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Know Before You Tow

BEFORE YOU BUY

If you are selecting a vehicle that will be used for towing, you should determine the approximate weight of the trailer you intend to tow, including the weight of any additional cargo and fluids that you will be carrying in the trailer. Also, be sure the vehicle has the proper optional equipment (refer to specific vehicle pages). Keep in mind that performance can be severely affected in hilly terrain when the minimum acceptable powertrain combination is selected. Consider purchasing a vehicle with a more powerful engine.

BRAKES

Many states require a separate braking system on trailers with a loaded weight of more than 1,500 pounds. Ford Motor Company recommends that a separate functional brake system be used on any towed vehicle, including those dolly-towed or towbar-towed. There are several basic types of brake systems designed to activate trailer brakes:

Electronically Controlled Brakes usually provide automatic and manual control of trailer brakes. They require that the tow vehicle be equipped with a controlling device and additional wiring for electrical power. These brakes typically have a control box installed within reach of the driver and can be applied manually or automatically.

Electric-Over-Hydraulic (EOH) Trailer Brakes are operated by an electrically powered pump that pressurizes a hydraulic fluid reservoir built into the trailer's brake system. Many of the available EOH trailer brake models are compatible with the Ford factory installed, dash-integrated Trailer Brake Controller (TBC).

Surge Brakes are independent hydraulic brakes activated by a master cylinder at the junction of the hitch and trailer tongue. They are not controlled by the hydraulic fluid in the tow vehicle's brake system and the tow vehicle's hydraulic system should never be connected directly to the trailer's hydraulic system.

Be sure your trailer brakes conform to all applicable state regulations. See Basic Towing Information on page 9 for additional braking information.

AFTER YOU BUY

Before heading out on a trip, check your vehicle Owner's Manual for break in and severe duty maintenance schedules (do not tow a trailer until your vehicle has been driven at least 1,000 miles). Be sure to have your fully loaded vehicle (including passengers) and trailer weighed so as not to exceed critical weight limits (see pages 6 and 7). If any of these limits are exceeded, cargo should be removed from the vehicle and/or trailer until all weights are within the specified limits.

TRAILER LAMPS

Make sure the trailer is equipped with lights that conform to all applicable government regulations. The trailer lighting system should not be connected directly to the lighting system of the vehicle. See a local recreational vehicle dealer or rental trailer agency for correct wiring and relays for the trailer and heavy-duty flashers.

SAFETY CHAINS

- Always use safety chains when towing. Safety chains are used to retain connection between the towing and towed vehicle in the event of separation of the trailer coupling or ball.
- Cross the chains under the trailer tongue to prevent the tongue from contacting the ground if a separation occurs. Allow only enough slack to permit full turning – be sure they do not drag on the pavement.
- When using a frame-mounted trailer hitch, attach the safety chains to the frame-mounted hitch using the recommendations supplied by the hitch manufacturer.
- See your vehicle Owner's Manual for safety chain attachment information.
- For rental trailers, follow rental agency instructions for hookup of safety chains.

TRAILER WIRING HARNESS

- Some vehicles equipped with a factory-installed Trailer Tow Package include a trailer wiring harness and a wiring kit.
- This kit includes one or more jumper harnesses (to connect to your trailer wiring connector) and installation instructions.

Trailer Classes

CLASS I LIGHT-DUTY

2,000-lb. maximum weight (trailer and cargo combined)

Small folding camping trailers and trailers for small boats, motorcycles and snowmobiles

Many Ford vehicles can handle easily
Conventional weight-carrying hitch

CLASS II MEDIUM-DUTY

2,001–3,500-lb. gross trailer weight

Large folding camping trailers, single-axle, small- to medium-length (up to 18-ft.) trailers

Ford trucks and compact SUVs can be equipped to tow these trailers¹

Conventional weight-distributing hitch not required unless specified for a particular vehicle

CLASS III HEAVY-DUTY

3,501–5,000-lb. gross trailer weight

Dual-axle or large single-axle travel trailers

Most properly equipped Ford trucks and SUVs can tow them¹

Conventional weight-distributing hitch not required unless specified for a particular vehicle

CLASS IV EXTRA-HEAVY-DUTY²

Over 5,000-lb. gross trailer weight²

Largest travel and 5th-wheel trailers made for recreation

Most Ford trucks and some SUVs can be equipped to handle trailer weights in this class¹

Most applications require a conventional weight-distributing or 5th-wheel hitch

Trailer Types

Folding Camping Trailer: These are very cost effective units providing campers with a comfortable, dry, mobile shelter, plus these added benefits:

Lightweight for easy towing

Simple conventional weight-carrying hitch is usually sufficient for towing

Compact, low-profile traveling package

Easily maneuverable – generally 8 to 16 feet long



Conventional Travel Trailer: Generally larger, rigid construction units offering more of the conveniences of home, including such features as kitchen sink, dinette, shower, refrigerator and flush toilet. Additional benefits include:

Widely varied levels of roominess, comfort and luxury – depending on the towing capacity of your vehicle and your budget

Sizes usually range from 12 to 35 feet long

Normally towed with a conventional weight-distributing hitch, depending on weight



5th-Wheel Trailer: Provides the same types of accommodations as a conventional travel trailer but with these unique characteristics:

The forward raised portion is designed to extend over the box of a pickup truck

Attaches to the truck via a 5th-wheel hitch mounted in the pickup bed

Offers the advantages of improved weight distribution and towing dynamics, since some trailer weight is directly over the towing vehicle



Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6.

1. Refer to specific vehicle pages for Required Equipment. 2. Some industry sources refer to trailers over 10,000 pounds as Class V Trailers. Ford F-150®, Super Duty® Pickups and Chassis Cabs can be equipped to handle these trailers.

HITCH STYLES

WEIGHT-CARRYING (NON-WEIGHT-DISTRIBUTING)

A weight-carrying (non-weight-distributing) hitch is commonly used to tow small- and medium-sized trailers. Choose a proper hitch and ball and make sure its location is compatible with that of the trailer.



Use a good weight-carrying hitch that uniformly distributes the trailer tongue loads through the bumper and frame (through the body with Escape®; bumper hitch not available with Escape® or Explorer®). Ford hitch receivers provide weight-carrying capacities as shown in the Hitch Receiver Capacity chart on the specific vehicle pages. (A label affixed to the hitch receiver provides both the weight-carrying and weight-distributing capacities for each receiver.) You are responsible for obtaining the proper hitch ball, ball mounting and other appropriate equipment to tow both the trailer and load that will be towed.

5TH-WHEEL

A 5th-wheel hitch is mounted in the pickup bed to put more of the trailer weight directly over the towing vehicle. The receiver center line of the hitch should be mounted at least two inches forward from the rear axle of the truck chassis. This mounting location will distribute the king pin weight of the trailer for optimum load-carrying and sway-control performance. 5th-wheel hitches are commonly used for RV trailers.



WEIGHT-DISTRIBUTING

A weight-distributing hitch is used in conjunction with a hitch platform (receiver) to distribute tongue load to all towing vehicle and trailer wheels. Required for certain Class III and all Class IV applications.



- Weight-distributing hitch platforms are welded or bolted to the vehicle frame. Bolt-on types are recommended because they can be removed.
- A properly installed bolt-on weight-distributing hitch platform should not weaken the vehicle or underbody as heat of welding might.
- Equalizing arms are connected from the hitch to the trailer's A-frame. They can be adjusted for best towing performance. Lengths of chain are pulled up and tightened to bend spring bars upward, which lifts some of the weight from the rear wheels and transfers weight to the other wheels of the vehicle and trailer.

GOOSENECK

A gooseneck hitch attaches in the truck bed using custom or universal rails. This hitch style provides great stability and is suitable for heavier loads, since the weight of the tongue rests directly on the truck bed over the rear axles. Goosenecks are commonly used for horse and other agricultural trailers. Other features include:



- Tight turning radius
- "Fold down" and "install under bed" models provide unobstructed bed area for carrying cargo when not towing
- Attachment rails require no welding (sold separately)

5TH-WHEEL AND GOOSENECK HITCH RECOMMENDATION

Shorter pickup boxes (e.g. 5.5'/6.5' F-150®, 6.75' F-250®/F-350®) provide less clearance between the cab and 5th-wheel/gooseneck trailer compared to "long box" pickups. When selecting a trailer and tow vehicle, it's critical that this combination provide clearance between the cab and tow vehicle for turns up to and including 90 degrees. Failure to follow this recommendation could result in the trailer contacting the cab of the tow vehicle during tight turns that are typical during low-speed parking and turning maneuvers. This contact could result in damage to the trailer and tow vehicle.

Ford Motor Company offers a factory-installed 5th-wheel hitch prep package option for Super Duty® only. Optional 5th-wheel hitch and gooseneck ball are also available. Go to ford.com/accessories for more information.



2026 F-150® STX SuperCrew® in Iconic Silver Metallic. When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Weight Limits

Base Curb Weight

PLUS

Cargo Weight

PLUS

Passenger Weight

EQUALS

**Gross Vehicle Weight
(GVW)**

GVW must not exceed GVWR (obtain from Safety Compliance Certification Label on the left front door lock facing or the door latch post pillar).

Gross Vehicle Weight

PLUS

Loaded Trailer Weight

EQUALS

**Gross Combination Weight
(GCW)**

GCW must not exceed GCWR (obtain from Trailer Towing Selector charts for each vehicle or your vehicle Owner's Manual).

Base Curb Weight is the weight of the vehicle including a full tank of fuel and all standard equipment. It does not include passengers, cargo or any optional equipment. Your dealership sales consultant can give you this number for the vehicle(s) you are considering.

Cargo Weight includes all weight added to the Base Curb Weight, including cargo and optional equipment (check with your sales consultant). When towing, trailer tongue load or king pin weight is also part of the Cargo Weight.

Payload is the combined maximum allowable weight of cargo and passengers that the vehicle is designed to carry. It is the Gross Vehicle Weight Rating minus the Base Curb Weight.

Gross Vehicle Weight (GVW) is the Base Curb Weight plus actual Cargo Weight plus passengers. It is important to remember that GVW is not a limit or specification – it is the actual weight that is obtained when the fully-loaded vehicle is driven onto a scale.

Gross Vehicle Weight Rating (GVWR) is the maximum allowable weight of the fully-loaded vehicle (including passengers and cargo). This number – along with other weight limits, as well as tire, rim size and inflation pressure data – is shown on the vehicle's Safety Compliance Certification Label, located on the left front door lock facing or the door latch post pillar (sample label on next page). **The GVW must never exceed the GVWR.**

Gross Axle Weight (GAW) is the total weight placed on each axle (front and rear). To determine the Gross Axle Weights for your vehicle and trailer combination, take your loaded vehicle and trailer to a scale. With the trailer attached, place the front wheels of the vehicle on the scale to get the front GAW. For rear GAW, weigh the towing vehicle with trailer attached, but with just the four wheels of the vehicle on the scale. Subtracting front GAW from that amount gives you rear GAW.

Gross Axle Weight Rating (GAWR) is the maximum weight to be carried by a single axle (front or rear). These numbers are also shown on the Safety Compliance Certification Label. **The total load on each axle must never exceed its GAWR.**

Gross Combination Weight (GCW) is the weight of the loaded vehicle (GVW) plus the weight of the fully loaded trailer. It is the actual weight obtained when the vehicle and trailer are weighed together on a scale.

Gross Combination Weight Rating (GCWR) is the maximum allowable weight of the towing vehicle and the loaded trailer – including all cargo and passengers – that the vehicle can handle without risking damage. (Important: The towing vehicle's brake system is rated for operation at the GVWR – NOT GCWR. Separate functional brake systems should be used for safe control of towed vehicles and for trailers weighing more than 1,500 lbs. when loaded.) **The measured GCW must never exceed the GCWR.**



When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Weight Limits

Maximum Loaded Trailer Weight (as shown in the Trailer Towing Selector charts for each vehicle) is the highest possible weight of a fully loaded trailer the vehicle can tow, based on a minimum towing vehicle GVW. It assumes a towing vehicle with any mandatory options, no cargo, tongue load of 10% (conventional trailer) or king pin weight of 15% (5th-wheel trailer), and driver and passenger (150 lbs. each). F-Series Super Duty® Chassis Cab models also assume a second-unit body weight based on 80 lbs. per foot cab-to-axle (CA). Weight of additional options, passengers, cargo and hitch must be deducted from this weight.

Tongue Load or 5th-Wheel King Pin Weight is another critical measurement that must be made before towing. It refers to the amount of the trailer's weight that presses down on the trailer hitch. Too much tongue load or king pin weight can cause suspension/drivetrain damage and can press the vehicle down in back causing the front wheels to lift to the point where traction, steering response and braking can be severely decreased. Too little tongue load or king pin weight can reduce rear-wheel traction and cause instability, which may result in tail wagging or jackknifing.

Tongue load or king pin weights must meet the following requirements:*

For trailers up to 2,000 lbs., tongue load not to exceed 200 lbs.

For conventional trailers over 2,000 lbs., tongue load is 10% of loaded trailer weight.

For 5th-wheel trailers, king pin weight is 15% of loaded trailer weight.

Examples:

For a 5,000-lb. conventional trailer, multiply 5,000 by .10 to obtain a proper tongue load of 500 lbs.

For an 11,500-lb. 5th-wheel trailer, multiplying 11,500 by .15 yields a king pin weight of 1,725 lbs.

Note: Be sure the addition of tongue load or king pin weight does not cause the key towing vehicle weight limits (GVWR and Rear GAWR) to be exceeded. Remember, GVWR and GAWR are found on the vehicle's Safety Compliance Certification Label. If either of these limits is exceeded, you should go with a larger vehicle or a smaller trailer.

MEASURING TONGUE LOAD WITH COMMERCIAL SCALE

To measure actual tongue load or king pin weight, disconnect the trailer and place only the tongue (king pin) on a scale (at hitch ball or 5th-wheel king pin receiver height). If the tongue load/king pin weight exceeds the upper weight limit, move more of the trailer contents rearward to achieve the recommended tongue load/king pin weight. If the tongue load or king pin weight is less than the lower limit, shift the load forward.

Sample Vehicle Safety Compliance Certification Label

(Refer to actual label on your vehicle)

Front GAWR

Rear GAWR GVWR

| | | | | | |
|--|--------|------------------------------|----|----------------------------|-----|
| MFD BY FORD MOTOR CO. | | DATE: 08/24 | | GVWR: 3357 KG (7400 LB) | |
| FRONT GAWR: 1701 KG (3750 LB) | | REAR GAWR: 1882 KG (4150 LB) | | TITRES WITH 275/65R18 116T | |
| TITRES 18x8.5J | | RIMS 18x8.5J | | TITRES RIMS | |
| AT 240 kPa/ 35 PSI COLD | | AT 240 kPa/ 35 PSI COLD | | AT 240 kPa/ 35 PSI COLD | |
| THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. | | | | | |
| VIN: 1FTFW3LDRFB46814 | | | | TYPE: Truck | |
| | | | | | |
| EXT PNT: LIM | | RC: 48 OSO | | F0127 | |
| WB | INT TR | TP/PS | R | AXLE | TR |
| 145 | FB | 2 | L6 | H | UUC |
| 220240812022 | | | | ULC | |
| | | | | SUSA-3520472-AA | |

Axle Code

*Refer to specific vehicle pages for tongue load recommendations with Ford factory-installed trailer hitch receivers.

Calculate Weight Distribution

WEIGHT DISTRIBUTION HITCH SETUP

- 1 Load trailer similar to the way it will be loaded for the trip with 10% tongue load and park on level ground
- 2 Adjust trailer tongue jack to get trailer level or just slightly nose down
- 3 Load tow vehicle similar to the way it will be used for the trip and park vehicle on level ground
- 4 Adjust and secure weight distribution ball mount height per manufacturer's instructions so tow ball is the same height as trailer coupler when trailer is not connected to tow vehicle
- 5 Measure top of front fender lip above the center of the wheel to ground
- 6 Record this value as "H1"

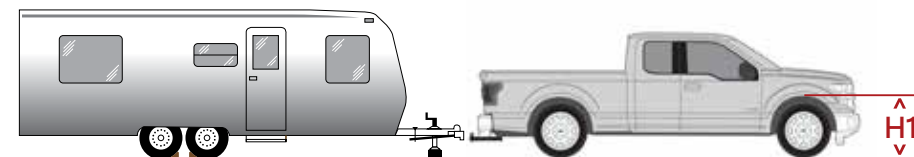


Figure 1

- 7 Connect trailer to tow ball with no weight distribution bars attached (make sure tongue jack is fully retracted)
- 8 Measure top of front fender lip above the center of the wheel to ground
- 9 Record this value as "H2"

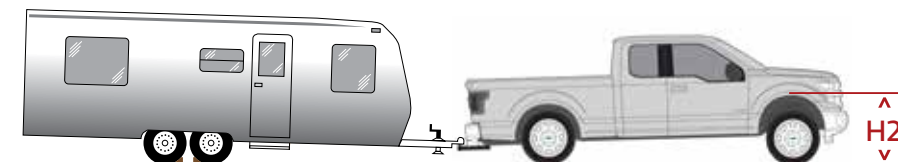


Figure 2

- 10 Adjust weight distribution bars per manufacturer's instructions to get tow vehicle top front of fender lip to "Target Height" and make sure trailer is level to slightly nose down
- 11 Complete coupler latching, electrical connections, safety chains and emergency braking system attachments

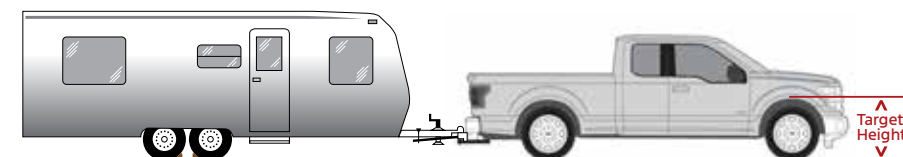


Figure 3

| Vehicle | Weight Distribution Correction Factor |
|----------------------------------|---------------------------------------|
| Mustang® | Not Required |
| Bronco Sport® | Not Required |
| Escape® | Not Required |
| Bronco® | Not Required |
| Explorer® | Not Required |
| Expedition® | 50% |
| Transit® | Use Not Recommended |
| Maverick® | Not Required |
| Ranger® | Not Required |
| F-150® Pickup | 50% |
| F-150 Lightning® | 50% |
| F-150 Raptor® Pickup | 50% |
| F-250®/F-350® Super Duty® Pickup | 50% |
| F-450® Super Duty Pickup | 25% Regular Cab 50% Crew Cab |
| Super Duty Chassis Cab (All) | 50% |

| CALCULATION EXAMPLE | |
|---------------------|--------------------------|
| Vehicle = | F-150 |
| H1 = | 37 inches |
| H2 = | 38 inches |
| Correction Factor = | 50% |
| Height Change = | 38" - 37" = 1 inch |
| Reduction Amount = | 1" x 50% = .50 inch |
| Height Change = | 38" - .50" = 37.5 inches |
| Target Height = | 37.5 inches |

≤ (H2) minus (H1)

≤ (Height Change) times (Correction Factor)

≤ (H2) minus (Reduction Amount)

Basic Towing Information

Towing a trailer is demanding on your vehicle, your trailer and your personal driving skills. Follow some basic rules that will help you with your towing experience.

Cargo And Weight Distribution

For optimum handling and braking, the load must be properly distributed

Keep center of gravity low for best handling

Cargo and load capacity limited by weight and weight distribution

Approximately 60% of the allowable cargo weight should be in the front half of the trailer and 40% in the rear (within limits of tongue load or king pin weight)

Load should be balanced from side-to-side to optimize handling and tire wear

Load must be firmly secured to prevent shifting during cornering or braking, which could result in a sudden loss of control

Before Starting

Before setting out on a trip, practice turning, stopping and backing up your trailer in an area away from heavy traffic

Know clearance required for trailer roof

Check equipment (make a checklist)

Backing Up

Back up slowly, with someone spotting near the rear of the trailer to guide you

Place one hand at bottom of steering wheel and move it in the direction you want the trailer to go

Make small steering inputs – slight movement of steering wheel results in much greater movement in rear of trailer

Braking

Allow considerably more distance for stopping with trailer attached

Remember, the braking system of the tow vehicle is rated for operation at the Gross Vehicle Weight Rating (GVWR), not Gross Combination Weight Rating (GCWR)

If your tow vehicle is an F-150®, F-Series Super Duty®, Transit® or Expedition® and your trailer

has electric brakes, the optional Integrated Trailer Brake Controller (TBC) assists in smooth and effective trailer braking by powering the trailer's electric or electric-over-hydraulic brakes with proportional output based on the towing vehicle's brake pressure

If you are experiencing trailer sway and your vehicle is equipped with electric brakes and a brake controller, activate the trailer brakes with the brake controller by hand. Do not apply the tow vehicle brakes as this can result in increased sway¹

Turning

When turning, be sure to swing wide enough to allow trailer to avoid curbs and other obstructions

Towing On Hills

Downshift the transmission to assist braking on steep downgrades and to increase power (reduce lugging) when climbing hills

With TorqShift® transmission, select tow/haul mode to automatically eliminate unwanted gear search when going uphill and help control vehicle speed when going downhill

Parking With A Trailer

Whenever possible, vehicles with trailers should not be parked on a grade. However, if it is necessary, place wheel chocks under the trailer's wheels, following the instructions below

Apply the foot service brakes and hold

Have another person place the wheel chocks under the trailer wheels on the downgrade side

Once the chocks are in place, release brake pedal, making sure the chocks will hold the vehicle and trailer

Apply the parking brake

Shift automatic transmission into park, or manual transmission into reverse

With 4-wheel drive, make sure the transfer case is not in neutral (if applicable)

Starting Out Parked On A Grade

Apply the foot service brake and hold
Start the engine with transmission in park (automatic) or neutral (manual)

Shift the transmission into gear and release the parking brake

Release the brake pedal and move the vehicle uphill to free the chocks

Apply the brake pedal while another person retrieves the chocks

Acceleration And Passing

The added weight of the trailer can dramatically decrease the acceleration of the towing vehicle – exercise caution

When passing a slower vehicle, be sure to allow extra distance. Remember, the added length of the trailer must clear the other vehicle before you can pull back in

Signal and make your pass on level terrain with plenty of clearance

If necessary, downshift for improved acceleration

Driving With An Automatic Overdrive Transmission

With certain automatic overdrive transmissions, towing – especially in hilly areas – may cause excessive shifting between overdrive and the next lower gear

When available, select tow/haul mode to automatically eliminate unwanted gear search and help control vehicle speed when going downhill

Driving With Cruise Control²

Turn off the cruise control with heavy loads or in hilly terrain. The cruise control may turn off automatically when you are towing on long, steep grades. Use caution while driving on wet roads and avoid using cruise control in rainy or winter weather conditions

Tire Pressure

Underinflated tires get hot and may fail, leading to possible loss of vehicle control

Overinflated tires may wear unevenly and compromise traction and stopping capability

Tires should be checked often for conformance to recommended cold inflation pressures

Spare Tire Use

A conventional, identical full-size spare tire is required for trailer towing (mini, compact and dissimilar full-size spare tires should not be used; always replace the spare tire with a new road tire as soon as possible)

On The Road

After about 50 miles, stop in a protected location and double-check:

Trailer hitch attachment

Lights and electrical connections

Trailer wheel lug nuts for tightness

Engine oil – check regularly throughout your trip

High Altitude Operation

Your vehicle may have reduced performance when operating at high altitudes and when heavily loaded or towing a trailer. While driving at elevation, in order to match driving performance as perceived at sea level, reduce Gross Vehicle Weight (GVW) and Gross Combination Weight (GCW) by 2% per 1,000 ft. elevation

Powertrain/Frontal Area Considerations

The charts in this Guide show the minimum powertrain needed to achieve an acceptable towing performance for the listed GCW of tow vehicle and trailer

Under certain conditions, however, (e.g., when the trailer has a large frontal area that adds substantial air drag or when trailering in hilly or mountainous terrain) it is wise to choose a vehicle with a higher rating
Towing performance is maximized with a low-drag, rounded front design trailer

Selecting A Trim Series

Your specific vehicle's tow capability could be reduced based on weight of selected trim series and option content

Note: For additional trailering information pertaining to your vehicle, refer to the vehicle Owner's Manual.

1. Driver-assist features are supplemental and do not replace the driver's attention, judgment and need to control the vehicle. Remember that even advanced technology cannot overcome the laws of physics. It's always possible to lose control of a vehicle due to inappropriate driver input for the conditions. 2. Driver-assist features are supplemental and do not replace the driver's attention, judgment and need to control the vehicle. They do not make your vehicle autonomous or replace your responsibility to drive safely. Please only use if you will pay attention to the road and be prepared to take over at any time. See Owner's Manual for details and limitations.

Towing Accessories



FORD ACCESSORIES

Ford Accessories offer a great selection of towing items to enhance function and comfort. For current price and warranty information, please contact your Ford Dealer or visit our website at: ford.com/accessories.



Trailer Hitch Wiring Harnesses – 4/7-Pin

This 4-pin wiring harness assembly is made to plug into the factory electrical system. The 4-pin design does not allow the use of trailers with electric brakes. Dealer installation recommended.

Base Part No. 15A416

The 7-pin design allows the use of trailers with electric brakes. Includes bracket for convenient attachment. Available for vehicles with or without reverse camera system option. Dealer installation recommended.

Base Part No. 15A416



Trailer Hitch Assemblies CLASS II, III and IV:

Original equipment hitch bolts directly into existing holes – no drilling or welding required. Rear fascia may require trimming for installation.

NOTE: Towing capacity could be limited by vehicle powertrain. See your Ford Dealer or Owner's Manual for details.

Base Part No. 19D520



Trailer Hitch Ball Mounts – Square Shank

Can be used in the raised or dropped position to match trailer coupler height. Available in durable black powdercoat. See your Ford Dealer or Owner's Manual for towing limitations.

Base Part No. 19A282



Trailer Hitch Ball

Forged, stainless steel construction for maximum strength and corrosion resistance. Available in three sizes – 1-7/8", 2" and 2-5/16". See your Ford Dealer for towing limitations.

Base Part No. 19F503



Locking Hitch Pin

This hitch lock allows you to lock the ball mount into the trailer hitch, deterring theft and helping prevent anyone from detaching your trailer at the ball mount. For 2" receivers.

Part No. VML3Z-19A326-A



5th-Wheel Hitch Kits

The 5th-Wheel Hitch Kits have a Gross Trailer Weight Rating of 20,000 and 35,000 lbs. Other features include a forged jaw; a high-capacity head support structure; 10° front-to-back pivot and 6° side-to-side pivot for easy hook-ups; 15-inch to 18-inch vertical height adjustment; and an extended-length handle.

NOTE: Requires 5th-Wheel and Gooseneck Hitch Prep Package. Other restrictions: only compatible with 8-foot beds – cannot be used with drop-in bedliners or bed mats. See Owner's Manual for specific vehicle tow ratings.

Base Part No. 19D520



Gooseneck Hitch Kit

This Gooseneck Hitch Ball has a Gross Trailer Weight Rating of 27,500 lbs. on a 2-5/16" ball and 40,000 lbs. with a 3" ball. The kit also includes two steel safety chain tie-down attachments and a durable plastic case.

NOTE: This kit is only for use with the 5th-Wheel and Gooseneck Hitch Prep Package. Other restrictions: cannot be used with drop-in bedliners or bed mats. See Owner's Manual for specific vehicle tow ratings.

Base Part No. 19F503

5th-Wheel/Gooseneck Hitch Prep Package

Required Prep Package for 5th-Wheel and Gooseneck Hitch Kits. 2017 and newer Super Duty® kits include in-bed wiring harness.

Base Part No. 5F057



Trailer Brake Kit

Vehicles must be equipped with Trailer Tow Package or Max Trailer Tow Package (wiring) for kit to be functional.

Base Part No. 19H332

Modular Trailer Convenience Technology

Upgrade the trailer towing experience using the following offerings. Rear camera view can be accessed on the center stack screen. (Check kit for compatibility with model year and base vehicle content.)

Part No. PC3Z-15A416-A
Base Trailer Wire Harness Kit with YAW Sensor Connection

Part No. PC3Z-15A416-B
Base Trailer Wire Harness Kit without YAW Sensor Connection

Part No. PC3Z-19G490-C
Trailer Mounted Camera Kit*

Part No. PC3Z-14D453-A
Trailer BLIS Kit*

Part No. PC3Z-1A189-AB
Trailer TPMS Monitoring Kit*

***Requires one of the Base Trailer Wire Harness Kits depending on base vehicle content.**

Trailer Tire Pressure Monitoring System (TPMS)

Displays the air pressure of a connected trailer's tires individually; alerts you if any tire is low or losing pressure – a numerical value will tell you how low.

Base Part No. 1A189
(Tire Pressure Monitoring System)



Telescoping Trailer Tow Mirrors

Manual: When towing, the mirror telescopes out to help increase your range of vision. When not towing, the mirror slides in for normal range. Mirrors also include a rearward folding feature that allows them to be folded against the vehicle for tight spaces. (Black housing.)

Power: Provides the same features as manual trailer tow mirrors, but the mirror glass features a power adjust. Mirror glass is also electrically heated to minimize snow and ice buildup. The mirror telescoping feature is still manual. (Black or chrome housing cap.)

NOTE: Power trailer tow mirrors are for vehicles equipped with power mirrors only and turn signal/marker light feature is only functional on vehicles originally equipped with those features.

Base Part No. 17682
Passenger Side

Base Part No. 17683
Driver Side

Base Part No. 17696 Kit
(Driver and Passenger Side)



F-SERIES® PERFORMANCE

When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Designed for getting things done, the 2026 F-Series vehicles combine exceptional strength with impressive performance and capability to your job-related towing or recreational needs.



2026 F-150 XLT SuperCrew® in Argon Blue Metallic. Max payload varies based on accessories and vehicle configuration. See label on doorjamb for carrying capacity of a specific vehicle. Always properly secure cargo.

F-150®

Combining exceptional strength, capability and intelligent technology, the 2026 F-150 is part of the Ford F-Series family that has been America's best-selling truck for 48 years straight.¹ F-150 excels in Built Ford Tough® productivity, delivering impressive towing and payload ratings, and depending on the trim level, the customer can choose from five gas engines or the 3.5L PowerBoost™ Full Hybrid powertrain to help get the job done.

**For information
on F-150 Towing
and Hauling
capabilities,
click here.**

EXCEPTIONAL PERFORMANCE AND CAPABILITY

F-150 performance and capability start with an impressive, torque-rich powertrain lineup. With six different F-150 engine choices, you can confidently pick the power that best fits your recreational vehicle or job-related towing needs.

Each F-150 engine is paired to an innovative 10-speed automatic transmission with optimized gear spacing, including three overdrive gears to help maximize shift points to optimize power, low-rpm torque and fuel efficiency. Selectable Drive Modes provide added functionality.

| Engine | HP @ rpm | Torque @ rpm | Available Max Towing (lbs.) ² | Available Max Payload (lbs.) ³ |
|---------------------------------------|-------------|---------------------|---|--|
| 2.7L EcoBoost® V6 ⁴ | 325 @ 5,500 | 400 lb.-ft. @ 3,500 | 8,400 | 1,775 |
| 3.5L EcoBoost V6 ⁴ | 382 @ 5,250 | 500 lb.-ft. @ 3,500 | 13,500 ⁵ | 2,440 |
| 3.5L PowerBoost™ Full Hybrid V6 | 420 @ 5,250 | 570 lb.-ft. @ 3,500 | 11,600 ⁵ | 1,740 |
| 5.0L Ti-VCT V8 | 400 @ 6,250 | 410 lb.-ft. @ 4,250 | 12,800 ⁵ | 2,235 ⁶ |
| 3.5L EcoBoost H. O. V6 ^{4,7} | 450 @ 5,250 | 510 lb.-ft. @ 3,500 | 8,200 | 1,405 ⁸ |
| 5.2L Supercharged V8 ⁹ | 720 @ 6,650 | 640 lb.-ft. @ 4,300 | 8,700 | 1,410 |

Note: • Horsepower, torque, payload and towing are independent attributes and may not be achieved simultaneously. For additional information, see your Ford Dealer.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6; to obtain information in centimeters, multiply inches by 2.54.

1. Based on 1977–2024 calendar year industry-reported total sales. 2. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories and number of passengers. 3. Max payload varies and is based on accessories and vehicle configuration. See label on doorjamb for carrying capacity of a specific vehicle. Always properly secure cargo. 4. Horsepower and torque ratings based on premium fuel per SAE J1349® standard. Your results may vary. 5. Requires Tow/Haul Package and Max Tow Axle upgrade (not shown). 6. Max payload of 2,225 lbs. on SuperCrew 4x2 with 5.0L gas engine and Tow/Haul Package and Max Tow Axle upgrade (not shown). 7. Raptor® only. 8. 37" tires. 9. Raptor only.



Super Duty® – Capable, Durable, Work Ready

The 2026 Super Duty Pickups represent the pinnacle of BUILT FORD TOUGH® with rugged durability and capability. Impressive powertrains and innovative connected features and services meet the needs of a multitude of commercial vocations and personal use towing customers. The 2026 Super Duty Chassis Cab models define the legendary work ethic and capability associated with work-ready Ford trucks for a wide range of commercial applications. F-350®/F-450®/F-550®/ and F-600® models are always ready to be upfit and are designed to conquer even the challenging jobs.

POWER TO GET THE JOB DONE

When talking capability — immense power and the Super Duty name go hand-in-hand. Four available engine choices are engineered to provide outstanding performance so you can take on whatever the day throws at you.

| Engine | HP @ rpm ¹ | Torque @ rpm ¹ | Available Max Towing (lbs.) ² | Available Max Payload (lbs.) ³ |
|--------------------------------------|-----------------------|---------------------------|---|--|
| 6.8L Gas V8 | 405 @ 5,000 | 445 lb.-ft. @ 4,000 | 18,900 ⁴ | 8,000 |
| 7.3L Gas V8 | 430 @ 5,500 | 485 lb.-ft. @ 4,000 | 22,500 ⁵ | 7,635 |
| 6.7L Power Stroke® Diesel | 475 @ 2,600 | 1,050 lb.-ft. @ 1,600 | 38,600 ⁵ | 6,952 |
| 6.7L High Output Power Stroke Diesel | 500 @ 2,600 | 1,200 lb.-ft. @ 1,600 | 40,000 ⁶ | 6,935 |

A 10-speed TorqShift® automatic transmission is standard on all models. All Chassis Cab 10-speed transmissions feature a Line-Drive power takeoff (PTO) provision⁷ with mobile mode and up to 300 lb.-ft. of torque.

For information
on Super Duty
Towing and
Hauling
capabilities,
[click here.](#)

CNG/Propane Gaseous Engine Prep Package⁸ includes hardened valves and valve seats to help ready your Super Duty for alternative-fuel upfits.

1. Horsepower and torque are independent attributes and may not be achieved simultaneously. 2. When properly equipped. Max towing varies and is based on cargo, vehicle configuration, accessories and number of passengers. 3. Max payload varies and is based on accessories and vehicle configuration. 4. Requires H.D. Payload Package (68F) & Gooseneck. 5. Gooseneck. 6. Requires 40K Gooseneck Tow Package (535). 7. Only available with 7.3L Gas V8 engine or 6.7L Power Stroke Diesel engine. 8. Availability varies by model and engine. See your Ford Dealer for details.



PICKUP TRUCKS

2026 F-150® Platinum SuperCrew® in Agate Black Metallic.
When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

TRAILER TOWING SELECTOR

- Select the F-Series® cab design and drive system (4x2 or 4x4) you prefer. (See pages 15–24.)
- Read down the column to find the trailer weight that can be towed with engine/axle ratio combinations listed.
- GCWR column shows maximum allowable combined weight of vehicle, trailer and cargo (including passengers) for each engine/axle ratio combination.

Maximum Loaded Trailer Weight assumes a towing vehicle with any mandatory options, no cargo, tongue load of 10% (conventional trailer) or king pin weight of 15% (5th-wheel trailer) and driver and passenger (150 lbs. each). Weight of additional options, passengers, cargo and hitch must be deducted from this weight. Also check Required Equipment on pages 19 and 26.



2026 F-150 STX SuperCrew shown with optional equipment in Argon Blue Metallic.
When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-150® Pickup

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | REGULAR CAB | | | | SUPERCAB | | SUPERCREW® | | |
|------------------------|------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------|---------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 122.8" WB | 4x2 141.5" WB | 4x4 122.8" WB | 4x4 141.5" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x4 157.2" WB |
| 5.0L 4-Valve V8 | 3.15 | 14,800 | | | | | 9,600 | | 9,500 | | |
| | 3.31 | 14,800 | | | | | 9,600 | | 9,500 | 9,200 | 9,100 |
| | | 14,900 | | | | 9,500 | | 9,500 | | | |
| | 3.73 | 13,900 | 9,000 | | | | | | | | |
| | | 14,600 | | | 9,400 | | | | | | |
| | | 15,300 | | 10,200 | | | | | | | |
| | | 15,600 | | | | | 10,400 | | | | |
| | | 15,700 | | | | 10,300 | | | 10,400 | | |
| | | 15,800 | | | | | | | | 10,200/10,000² | 10,100 |
| | | 15,900 | | | | | | 10,500 | | | |
| | | 17,700 | | | | | | 12,300³ | | | |
| | | 17,900 | | | | | 12,700³ | | | | |
| | | 18,100 | | | | | | | 12,800³ | | |
| | | 18,400 | | | | | | | | 12,800³ | 12,700³ |

- Notes:**
- Do not exceed trailer weight of 5,000 lbs. when towing without a weight-distribution system.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6; to obtain information in centimeters, multiply feet by 30.48.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Tremor® Trim Series. 3. Requires Tow/Haul Package (53T) and optional Max Tow Axle.



2026 F-150 XLT SuperCrew shown with optional equipment in Argon Blue Metallic.

When properly equipped. Requires Tow/Haul Package and optional Max Tow Axle. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-150® Pickup

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | REGULAR CAB | | SUPERCAB | | SUPERCREW® | | |
|-----------------------------------|------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 141.5" WB | 4x4 141.5" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x4 157.2" WB |
| 2.7L GTDI V6 | 3.15/3.55 | 12,300 | 7,400 | | | | | | |
| | | 12,700 | | 7,500 | 7,500 | | | | |
| | | 12,800 | | | | 7,400 | 7,600 | | |
| | 3.55 | 13,000 | | | | | | 7,500 | |
| | 3.73 | 13,300 | 8,400 | | | | | | |
| | | 13,400 | | 8,200 | 8,200 | 8,000 | 8,200 | | |
| 3.5L GTDI V6 | 3.31 | 16,200 | 10,900 | | | | | | |
| | | 16,300 | | | 10,900 | | | | |
| | | 16,500 | | 11,000 | | | 10,600 | | |
| | | 16,600 | | | | 10,700 | | | |
| | | 16,800 | | | | | | 10,500 | 10,900 |
| | | 16,800 | | | | | | | |
| | 3.55 | 16,200 | 10,900 | | | | | | |
| | | 16,300 | | | 10,900 | | | | |
| | | 16,500 | | 11,000 | | | 10,600 | | |
| | | 16,600 | | | | 10,700 | | | |
| | | 16,800 | | | | | | 10,500 | 10,900 |
| | | 17,700 | | | | 10,700 | | | |
| 3.5L GTDI V6 H.O. ² | 4.10 | 19,300 ⁴ | | | | | 13,300 | | |
| | | 19,400 ⁴ | | | | | | 13,100 | 13,500 |
| | | 17,100 ⁵ | | | | | | 10,600 | |
| | | 14,600 | | | | | | 8,200 | |
| 5.2L Supercharged V8 ³ | 4.10 | 14,650 | | | | | | 8,200 | |
| | | 15,300 | | | | | | 8,700 | |

- Notes:**
- Do not exceed trailer weight of 5,000 lbs. when towing without a weight-distribution system.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.

¹ Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. ² Raptor only. ³ Raptor R only. ⁴ Requires Tow/Haul Package (53T) and optional Max Tow Axle. ⁵ Tremor® Trim Series.



2026 F-150 Hybrid Platinum SuperCrew in Agate Black Metallic.
When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-150® Hybrid

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | SUPERCREW® | | | | SUPERCREW | | | |
|------------------------|------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 145.4" WB | 4x2 157.2" WB | 4x4 145.4" WB | 4x4 157.2" WB | 4x2 145.4" WB | 4x2 157.2" WB | 4x4 145.4" WB | 4x4 157.2" WB |
| 3.5L Hybrid V6 | 3.55 | 17,100 | 11,100 | | | | 9,000 | | | |
| | | 18,400 ² | 12,300 | | | | 9,000 | | | |
| | 3.73 | 17,100 | | 11,100 | 10,800 | 10,800 | | 9,200 | 7,200 | 7,100 |
| | | 18,400 ² | | 12,400 | 11,600 | 11,500 | | 9,200 | 7,200 | 7,100 |

- Notes:**
- Do not exceed trailer weight of 5,000 lbs. when towing without a weight-distribution system.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.

F-150 Lightning®

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | SUPERCREW | |
|----------------------------|------------|-----------------------|---------------|--|
| Engine | Axle Ratio | GCWR (lbs.) | 4x4 145.4" WB | |
| Electric (F-150 Lightning) | 9.61 | 15,000 | 7,700 | |
| | | 15,900 ³ | 8,700 | |
| | | 16,800 ^{4,5} | 9,700 | |
| | | 17,300 ⁴ | 10,000 | |

- Notes:**
- Do not exceed trailer weight of 5,000 lbs. when towing without a weight-distribution system.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.



2026 F-150 Lightning SuperCrew in extra-cost color Ruby Red Metallic Tinted Clearcoat.
When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in centimeters, multiply inches by 2.54.

¹ Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. ² Requires Tow/Haul Package (53T) and optional Max Tow Axle. ³ Platinum model. ⁴ Requires Max Trailer Tow Package (53D). ⁵ Requires 20" All-Terrain tires.

F-150® Pickup

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | REGULAR CAB | | | | SUPERCAB | | SUPERCREW® | | |
|------------------------|------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|----------------------------|----------------------------|---------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 122.8" WB | 4x2 141.5" WB | 4x4 122.8" WB | 4x4 141.5" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x2 145.4" WB ² | 4x4 145.4" WB ² | 4x4 157.2" WB |
| 5.0L 4-Valve V8 | 3.15 | 14,800 | | | | | 9,500 | | 9,400 | | |
| | | 14,800 | | | | | 9,500 | | 9,400 | 9,100 | 9,100 |
| | | 14,900 | | | | 9,500 | | 9,400 | | | |
| | 3.73 | 13,900 | 8,700 | | | | | | | | |
| | | 14,600 | | | 8,300 | | | | | | |
| | | 15,300 | | 10,100 | | | | | | | |
| | | 15,600 | | | | | 10,200 | | | | |
| | | 15,700 | | | | 9,900 | | | 9,500 | | |
| | | 15,800 | | | | | | | | 9,300/8,200 ⁴ | 9,600 |
| | | 15,900 | | | | | | 9,800 | | | |
| | | 17,700 ³ | | | | | | 9,800 | | | |
| | | 17,900 ³ | | | | | 10,200 | | | | |
| | | 18,100 ³ | | | | | | | 11,700 | | |
| | | 18,400 ³ | | | | | | | | 10,000 | 10,000 |

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | REGULAR CAB | | SUPERCAB | | SUPERCREW® | | |
|------------------------|------------|---------------------|---------------|---------------|---------------|---------------|----------------------------|----------------------------|---------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 141.5" WB | 4x4 141.5" WB | 4x2 145.4" WB | 4x4 145.4" WB | 4x2 145.4" WB ² | 4x4 145.4" WB ² | 4x4 157.2" WB |
| 2.7L GTDI V6 | 3.15/3.55 | 12,300 | 7,300 | | | | | | |
| | | 12,700 | | 7,400 | 7,200 | | | | |
| | | 12,800 | | | | 7,300 | 7,100 | | |
| | 3.55 | 13,000 | | | | | | 7,000 | |
| | | 13,300 | 8,300 | | | | | | |
| | | 13,400 | | 8,100 | 7,200 | 7,300 | 7,100 | | |
| 3.5L GTDI V6 | 3.31 | 13,500 | | | | | | 7,000 | |
| | | 16,200 | 10,800 | | | | | | |
| | | 16,300 | | | 8,000 | | | | |
| | | 16,500 | | 10,200 | | | 8,100 | | |
| | | 16,600 | | | | 8,200 | | | |
| | 3.55 | 16,800 | | | | | | 8,000 | 8,200 |
| | | 16,200 | 10,800 | | | | | | |
| | | 16,300 | | | 8,600 | | 8,100 | | |
| | | 16,500 | | 10,200 | | | | | |
| | | 16,600 | | | | 8,200 | | | |
| | | 16,800 | | | | | | 8,000 | 8,200 |
| | | 17,700 | | | | 8,200 | | | |
| | | 19,300 ³ | | | | | 10,300 | | |
| | | 19,400 ³ | | | | | | 8,700 | 9,000 |
| | 3.73 | 17,100 ⁴ | | | | | | 8,000 | |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer king pin load weight should be 15% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer king pin load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.

TAILGATE CLEARANCE

Considerations When Towing a 5th-Wheel or Gooseneck Trailer[†]

Model **F-150**

Max. Tailgate Height 4x4* 58.3 inches

[†]5th-wheel towing is not recommended for Raptor or Lightning models.

*Distance from ground to top of closed tailgate lip at base curb weight.

Note: Maximum tailgate height will vary based upon vehicle configuration, option content and tire size.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Vehicles equipped with a 5.5' box will accept a 5th-wheel hitch but most 5th-wheel trailer designs are not compatible with this model. 3. Requires Tow/Haul Package (53T) and optional Max Tow Axle. 4. Tremor® Trim Series.

F-150® Pickups

AVAILABLE TRAILER TOW PACKAGES

| Equipment | F-150 Lightning® (17V) (53D) ¹ | F-150 (53T) | F-150 Max Tow Axle ³ (NOC) | Raptor® (NOC) |
|--------------------------------------|---|----------------|---|------------------|
| 7-Wire Harness & 4-/7-Pin Connector | S | S | S | S |
| Hitch Receiver | S | S | S | S |
| Upgraded Trailer Hitch | | | I | |
| Auto Trans. Oil Cooler | | S | | S |
| Radiator Upgrade | | | | S |
| Smart Trailer Tow Connector | S | S | S | S |
| Upgraded Rear Axle Ratio | | | I ^{2,3} | S |
| Electronic Locking Rear Differential | | I | I | S |
| Increase Tow Capacity | | I ⁶ | I | |
| Tow/Haul Mode | S | S | S | S |
| Tow Hooks Front | S | S | S ^{4,5} | S |
| 2-Speed Automatic 4WD | | | S ^{4,5} | S |
| Trailer Brake Controller (TBC) | | I | I | S |
| Trailer Sway Control | S | S | S | S |
| Lane Keeping System | S | S | | |
| Trailer Reverse Guidance | I | | S | S |
| 360-Degree Camera | I | | S ⁴ | S |
| Pro Trailer Backup Assist™ | I | | S ⁴ | S |
| Pro Trailer Hitch Assist™ | I | | S ⁴ | S |
| Hill Descent Control | | I ⁶ | | |

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

LEGEND

I = Equipment is included in the package
S = Equipment is standard on the vehicle
NOC = No Option Code assigned

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for an **F-150 Pickup**/trailer combination is **55 sq. ft. for vehicles with Trailer Tow Rating of 7,700 lbs. or less, 65 sq. ft. for vehicles with Trailer Tow Rating of 7,701 lbs. and greater and 75 sq. ft. for all 5th-Wheel and Gooseneck applications**. Exceeding these limitations may significantly reduce the performance of your towing vehicle.

The maximum trailer frontal area that must be considered for an **F-150 Lightning**/trailer combination is **60 sq. ft.** Exceeding this limitation may significantly reduce the performance of your towing vehicle.

FACTORY-INSTALLED TRAILER HITCH RECEIVER OPTION

F-150 Lightning

Standard

F-150 Raptor Pickup

Standard

F-150 Pickup

A 2" hitch receiver rated at 11,600 lbs. is standard. Max Tow Axle includes 2" reinforced receiver rated at 14,000 lbs.

See Hitch Receiver Weight Capacity chart for the weight-carrying and weight-distributing capacities of these hitch receivers. (These capacities also are shown on a label affixed to each receiver.)

REQUIRED EQUIPMENT

F-150 Gas Pickup

For trailers over 11,600 lbs. – Tow/Haul Package (53T) and optional Max Tow Axle³

F-150 Hybrid

For trailers over 10,800 lbs. – Tow/Haul Package (53T) and optional Max Tow Axle³

F-150 Lightning

For trailers over 7,700 lbs. – Max Trailer Tow Package (53D)

Your New Vehicle Limited Warranty may be voided if you tow without them.⁷

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁸ | Max. Tongue Load (lbs.) | Weight-Distributing Max. Trailer Capacity (lbs.) ⁸ | Max. Tongue Load (lbs.) |
|-----------------|--|----------------------------|--|----------------------------|
| F-150 | 5,000 | 500 | 13,500 ⁹ | 1,400 |
| F-150 Lightning | 5,000 | 500 | 10,000 | 1,000 |

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| | Rear Axle Ratio | Non-Limited Slip | Electronic Locking |
|-----------------|-----------------|------------------|--------------------|
| F-150 Pickup | 3.15 | 15 | Not Available |
| | 3.31 | 27 | L3 |
| | 3.55 | 19 | L9 |
| | 3.73 | Not Available | L6 |
| | 4.10 | Not Available | L4 |
| F-150 Lightning | 9.61 | Standard | Available (53D) |

1. Requires Pro Power Onboard – 9.6 kW. 2. Standard on PowerBoost™. 3. Optional Max Tow Axle required to achieve maximum towing. 4. Standard on Lariat and above. 5. Require 4x4 drive. 6. Optional on Pro Trim, standard on STX Trim. 7. See your Ford Dealer for limited warranty details. 8. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, weight-distributing equipment (i.e., equalizing arms and snap-up brackets, sway control system) and other appropriate equipment to tow both the trailer and its cargo load. 9. Requires Tow/Haul Package (53T) and optional Max Tow Axle.



2026 F-250 XL STX Crew Cab in Agate Black Metallic.
When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-250® SRW Super Duty® Pickup

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| Automatic Transmission | | | REGULAR CAB | | SUPERCAB | | | | CREW CAB | | | |
|---------------------------|------------|-------------|----------------------|----------------------|--------------------------|----------------------|--------------------------|----------------------|--------------------------|----------------------|--------------------------|----------------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 148.0" WB 6-3/4' Box | 4x2 164.2" WB 8' Box | 4x4 148.0" WB 6-3/4' Box | 4x4 164.2" WB 8' Box | 4x2 159.8" WB 6-3/4' Box | 4x2 176.0" WB 8' Box | 4x4 159.8" WB 6-3/4' Box | 4x4 176.0" WB 8' Box |
| 6.7L V8 Turbo Diesel | 3.31 | 23,500 | 16,600 | 16,200 | | 16,200 | 15,900 | 15,800 | 16,200 | 15,900 | 15,900 | 15,500 |
| | | 30,000² | 18,200 | 20,000 | 18,200 | 19,500 | 20,000 | 22,000 | 19,500 | 19,500 | 22,000 | 21,900 |
| | 3.55 | 28,300⁴ | | | | | | | | | 18,200 | |
| | | 30,000² | 18,200 | 20,000 | 18,200 | 19,500 | 20,000 | 22,000 | 19,500 | 19,500 | 22,000 | 21,900 |
| 6.7L V8 H.O. Turbo Diesel | 3.31 | 31,000² | 18,200 | 20,000 | 18,200 | 19,500 | 20,000 | 22,000 | 19,500 | 19,500 | 22,000 | 22,000 |
| | 3.55E³ | 28,300⁴ | | | | | | | | | 18,200 | |
| | 3.55 | 31,000² | 18,200 | 20,000 | 18,200 | 19,500 | 20,000 | 22,000 | 19,500 | 19,500 | 22,000 | 22,000 |
| 6.8L V8 | 3.73 | 21,000 | 14,800 | 14,400 | 14,500 | 14,500 | 14,100 | 14,100 | 14,500 | 14,300 | 14,100 | 13,800 |
| | 4.30 | 23,500 | 17,300 | 16,900 | 17,000 | 17,000 | 16,600 | 16,600 | 17,000 | 16,800 | 16,600 | 16,300 |
| 7.3L V8 | 3.73 | 23,500 | | 16,900 | 17,100 | 17,000/16,900⁵ | 16,600 | 16,600 | | | 16,700 | 16,400 |
| | 3.73E³ | 24,600 | 18,200 | 18,000 | 18,200 | 18,100/18,000⁵ | 17,700 | 17,700 | 18,100 | 17,900 | 17,800 | 17,500 |
| | 4.30 | 26,000 | 18,200 | 18,200 | 18,200 | 18,200 | 18,200 | 18,200 | 18,200 | 18,200 | 18,200⁴ | 18,200 |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Conventional trailer tongue load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

Metric Conversion – To obtain information in kilograms, multiply pounds by .45;
to obtain information in centimeters, multiply inches by 2.54.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires F-250 High-Capacity Axle Upgrade Package (535). 3. 3.55E and 3.73E are electronic locking rear axles. 4. Tremor® Off-Road Package (17Y). 5. Fixed 9,900 GVWR.



2026 F-250 Lariat Crew Cab in Agate Black

F-250® SRW Super Duty® Pickup

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| | | | REGULAR CAB | | | | SUPERCAB | | | | | | | | CREW CAB | | | | | | | |
|------------------------------|--------------------|---------------------|-------------------------|----------------|-------------------------|----------------|-----------------------------|----------------|--------------------------------|----------------|--------------------------------|--------------------------------|---|---|-----------------------------|----------------|---|--------------------------------|---|---|---|---|
| Automatic Transmission | | | 4x2 141.6" WB 8' Box | | 4x4 141.6" WB 8' Box | | 4x2 148.0" WB 6-3/4' Box | | 4x2 164.2" WB 8' Box | | 4x4 148.0" WB 6-3/4' Box | | 4x4 164.2" WB 8' Box | | 4x2 159.8" WB 6-3/4' Box | | 4x2 176.0" WB 8' Box | | 4x4 159.8" WB 6-3/4' Box | | 4x4 176.0" WB 8' Box | |
| Engine | Axle Ratio | GCWR (lbs.) | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck | 5th- Wheel | Goose- neck |
| 6.7L V8 Turbo Diesel | 3.31 | 23,500 | 16,300 | 16,500 | 15,900 | 16,100 | | | 15,900/ 15,800 ⁶ | 16,100 | 14,600/ 14,000 ⁶ | 15,700/ 15,000 ⁶ | 14,100/ 15,600 ⁵ / 13,400 ⁶ | 15,100/ 15,700 ⁵ / 14,400 ⁶ | 16,000 | 16,100 | 15,000/ 15,700 ⁵ / 14,400 ⁶ | 15,900/ 15,400 ⁶ | 14,400/ 13,700 ⁶ / 15,600 ⁵ | 15,400/ 14,800 ⁵ / 15,800 ⁵ | 12,200/ 11,600 ⁶ / 15,300 ⁵ | 13,300/ 12,600 ⁶ / 15,400 ⁵ |
| | | 30,000 ² | 22,300 | 22,900 | 21,600 | 22,500 | 20,900 | 21,900 | 20,900 | 21,900 | 20,400 | 21,500 | 20,600 | 21,600 | 20,900 | 21,900 | 20,200 | 21,200 | 20,500 | 21,500 | 19,400 | 20,400 |
| | 3.55 | 28,300 ⁴ | | | | | | | | | | | | | | | | | 19,000 | 20,000 | | |
| | | 30,000 ² | 22,300 | 22,900 | 21,600 | 22,500 | 20,900 | 21,900 | 20,900 | 21,900 | 20,400 | 21,500 | 20,600 | 21,600 | 20,900 | 21,900 | 20,200 | 21,200 | 20,500 | 21,500 | 19,400 | 20,400 |
| 6.7L V8 H.O. Turbo Diesel | 3.31 | 31,000 ² | 22,300 | 23,000 | 21,600 | 22,700 | 20,900 | 21,900 | 20,900 | 21,900 | 20,400 | 21,400 | 20,600 | 21,600 | 20,900 | 21,900 | 20,200 | 21,200 | 20,500 | 21,500 | 19,800 | 20,800 |
| | 3.55E ³ | 28,300 ⁴ | | | | | | | | | | | | | | | | | 18,900 | 19,900 | | |
| | 3.55 | 31,000 ² | 22,300 | 23,000 | 21,600 | 22,700 | 20,900 | 21,900 | 20,900 | 21,900 | 20,400 | 21,400 | 20,600 | 21,600 | 20,900 | 21,900 | 20,200 | 21,200 | 20,500 | 21,500 | 19,800 | 20,800 |
| 6.8L V8 | 3.73 | 21,000 | 14,600 | 14,800 | 14,200 | 14,400 | 14,300 | 14,500 | 14,200 | 14,400 | 13,900 | 14,000 | 13,800 | 14,000 | 14,300 | 14,400 | 14,000 | 14,200 | 13,900 | 14,100 | 13,600 | 13,700 |
| | 4.30 | 23,500 | 17,100 | 17,300 | 16,700 | 16,900 | 16,800 | 17,000 | 16,700 | 16,900 | 16,400 | 16,500 | 16,300 | 16,500 | 16,800 | 16,900 | 16,500 | 16,700 | 16,400 | 16,600 | 16,100 | 16,200 |
| 7.3L V8 | 3.73 | 23,500 | | | 16,700 | 16,900 | 16,800 | 17,000 | 16,700 | 16,900 | 16,400 | 16,600 | 16,300 | 16,500 | | | | | 16,400 | 16,600 | 16,100 | 16,300 |
| | 3.73E ³ | 24,600 | 18,200 | 18,400 | 17,800 | 18,000 | 17,900 | 18,100 | 17,800 | 18,000 | 17,500 | 17,700 | 17,400 | 17,600 | 17,900 | 18,000 | 17,700 | 17,800 | 17,500 | 17,700 | 17,200 | 17,400 |
| | 4.30 | 26,000 | 19,500 | 19,500 | 19,200 | 19,400 | 19,300 | 19,500 | 19,200 | 19,400 | 18,900 | 19,100 | 18,800/ 18,600 ⁶ | 19,000 | 19,300 | 19,400 | 19,100 | 19,200 | 18,900/ 18,500 ⁴ | 19,100/ 18,500 ⁴ | 17,800/ 17,100 ⁶ | 18,800/ 18,100 ⁶ |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Conventional trailer tongue load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

TAILGATE CLEARANCE

Considerations When Towing a 5th-Wheel or Gooseneck Trailer

| Model | F-250 SRW | F-350® SRW | F-350 DRW | F-450® DRW | TREMOR® |
|---------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Max. Tailgate Height 4x4 ⁷ | 57.9–60.0 inches | 57.9–59.7 inches | 58.0–59.7 inches | 58.6–60.3 inches | 59.5–61.3 inches |

Note: Maximum tailgate height will vary based upon vehicle configuration, option content and tire size.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires F-250 High-Capacity Axle Upgrade Package (535). 3. 3.55E and 3.73E are electronic locking rear axles. 4. Tremor® Off-Road Package (17Y). 5. 10,000 plus GVWR. 6. Fixed 9,900 GVWR. 7. Distance from ground to top of closed tailgate lip at base curb weight.



2026 F-350 Platinum® Crew Cab in Star White Metallic Tri-Coat.
When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-350® SRW Super Duty® Pickup

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference “Ford University” Job Aid “Spec’ing F-Series Trucks for Towing”.

| Automatic Transmission | | | REGULAR CAB | | | SUPERCAB | | | | CREW CAB | | | |
|------------------------------|------------|---------------------|-------------------------|----------------------------|-----------------------------|-------------------------|------------------------------|------------------------------|-----------------------------|----------------------------|------------------------------|------------------------------|--|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 148.0" WB 6-3/4' Box | 4x2 164.2" WB 8' Box | 4x4 148.0" WB 6-3/4' Box | 4x4 164.2" WB 8' Box | 4x2 159.8" WB 6-3/4' Box | 4x2 176.0" WB 8' Box | 4x4 159.8" WB 6-3/4' Box | 4x4 176.0" WB 8' Box | |
| 6.7L V8 Turbo Diesel | 3.31 | 31,000 | 20,000 | 20,000 | 20,000 | 23,000 | 20,000 | 23,200/23,100 ^{2,3} | 23,000 | 23,000 | 23,200/23,100 ^{2,3} | 22,900/22,800 ³ | |
| | 3.55 | 31,000 | 20,000 | 20,000 | 20,000 | 23,000 | 20,000 | 23,200/23,100 ^{2,3} | 23,000 | 23,000 | 23,200/23,100 ^{2,3} | 22,900/22,800 ³ | |
| | | 31,200 ⁴ | | | | | | | | | 18,200 | | |
| 6.7L V8 H.O. Turbo Diesel | 3.31 | 31,800 | 20,000 | 20,000 | | | 20,000 | 23,700/23,900 ^{2,3} | | 23,000 | 23,500/23,900 ^{2,3} | 23,500/23,600 ^{2,3} | |
| | 3.55 | 31,200 ⁴ | | | | | | | | | 18,200 | | |
| | | 35,200 | 20,000 | 20,000 | | 23,000 | 20,000 | 23,700/24,000 ^{2,3} | | 23,000 | 23,500/24,000 ^{2,3} | 23,500/25,000 ^{2,3} | |
| 6.8L V8 | 3.73 | 21,000 | 14,700 ² | 14,400/14,300 ³ | 14,500/14,400 ² | 14,400 ² | 14,100/14,000 ^{2,3} | 14,000 | 14,400 | 14,200/14,100 ² | 14,000 | 13,800/13,700 ^{2,3} | |
| | 4.30 | 24,400 | 18,100 ² | 17,800/17,700 ³ | 17,900/17,800 ² | | 17,500/17,400 ^{2,3} | 17,400 | 17,800 | 17,600/17,500 ² | | 17,200/17,100 ^{2,3} | |
| 7.3L V8 | 3.73 | 25,200 | 18,200 ² | 18,200 | 18,200 | 18,200 | 18,100/18,000 ^{2,3} | 18,000 | 18,200 | 18,200/18,100 ² | 18,000/17,900 ³ | 17,800 | |
| | 4.30 | 28,600 ⁴ | | | | | | | | | 18,200 | | |
| | | 29,000 | 18,200 ² | 19,500 | 18,200 | 19,500 ² | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Conventional trailer tongue load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. 18" All-Season Tires. 3. 18" and 20" All-Terrain Tires. 4. Tremor® Off-Road Package (17Y).

F-350® SRW Super Duty® Pickup

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference "Ford University" Job Aid "Spec'ing F-Series Trucks for Towing".

| | | | REGULAR CAB | | | | SUPERCAB | | | | | | | | CREW CAB | | | | | | | |
|---------------------------|------------|-------------|--------------------------------|--------------------------------|--|--|--------------------------------|--------------------------------|--------------------------------|--------------------------------|----------------------------------|----------------------------------|--|----------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--|--|--|----------------------------------|
| Automatic Transmission | | | 4x2 141.6" WB 8' Box | | 4x4 141.6" WB 8' Box | | 4x2 148.0" WB 6-3/4' Box | | 4x2 164.2" WB 8' Box | | 4x4 148.0" WB 6-3/4' Box | | 4x4 164.2" WB 8' Box | | 4x2 159.8" WB 6-3/4' Box | | 4x2 176.0" WB 8' Box | | 4x4 159.8" WB 6-3/4' Box | | 4x4 176.0" WB 8' Box | |
| Engine | Axle Ratio | GCWR (lbs.) | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck |
| 6.7L V8 Turbo Diesel | 3.31 | 31,000 | 22,100/ 23,700 ² | 23,100/ 23,800 ² | 22,000/ 23,300 ^{2,3} | 23,000/ 23,400 ^{2,3} | 21,400/ 23,500 ² | 22,400/ 23,600 ² | 20,800/ 23,200 ² | 21,800/ 23,400 ² | 20,800/ 23,000 ^{2,3} | 21,800/ 23,200 ^{2,3} | 20,500/ 22,800 ^{2/} 22,900 ³ | 21,500/ 23,000 ^{2,3} | 20,700/ 23,300 ² | 21,700/ 23,400 ² | 20,200/ 22,900 ² | 21,200/ 23,200 ² | 20,500/ 22,700 ^{2/} 22,900 ³ | 21,500/ 23,000 ^{2,3} | 19,800/ 22,600 ^{2,3} | 20,900/ 22,800 ^{2,3} |
| | 3.55 | 31,000 | 22,100/ 23,700 ² | 23,100/ 23,800 ² | 22,000/ 23,300 ^{2,3} | 23,000/ 23,400 ^{2,3} | 21,400/ 23,500 ² | 22,400/ 23,600 ² | 20,800/ 23,200 ² | 21,800/ 23,400 ² | 20,800/ 23,000 ^{2,3} | 21,800/ 23,200 ^{2,3} | 20,500/ 22,800 ^{2/} 22,900 ³ | 21,500/ 23,000 ^{2,3} | 20,700/ 23,300 ² | 21,700/ 23,400 ² | 20,200/ 22,900 ² | 21,200/ 23,200 ² | 20,500/ 22,700 ^{2/} 22,900 ³ | 21,500/ 23,000 ^{2,3} | 19,800/ 22,600 ^{2,3} | 20,900/ 22,800 ^{2,3} |
| 6.7L V8 H.O. Turbo Diesel | 3.31 | 31,800 | 22,100/ 24,500 ² | 23,100/ 24,600 ² | 22,000/ 24,000 ^{2/} 24,000 ³ | 23,000/ 24,200 ^{2,3} | | | | | 20,800/ 23,800 ^{2,3} | 21,800/ 24,000 ^{2,3} | 20,500/ 22,600 ^{2/} 23,600 ³ | 21,500/ 23,600 ^{2,3} | | | 20,300/ 23,000 ² | 21,300/ 24,000 ² | 20,500/ 22,600 ^{2/} 23,600 ³ | 21,500/ 23,800 ³ | 19,900/ 22,600 ^{2/} 23,400 ³ | 20,900/ 23,600 ^{2,3} |
| | 3.55 | 31,200 | | | | | | | | | | | | | | | | | 22,900 ⁴ | 23,000 ⁴ | | |
| | 35,200 | | 22,100/ 24,800 ² | 23,100/ 25,800 ² | 22,000/ 24,700 ^{2/} 27,400 ³ | 23,000/ 25,700 ^{2/} 27,600 ³ | | | 20,800/ 23,600 ² | 21,900/ 24,600 ² | 20,800/ 23,800 ^{2,3} | 21,800/ 24,800 ^{2,3} | 20,500/ 22,600 ^{2/} 26,300 ³ | 21,500/ 23,600 ^{2,3} | | | 20,300/ 23,000 ² | 21,300/ 24,000 ² | 20,500/ 22,600 ^{2/} 25,900 ³ | 21,500/ 23,000 ^{2/} 26,900 ³ | 19,900/ 22,600 ^{2/} 25,600 ³ | 20,900/ 23,600 ^{2,3} |
| 6.8L V8 | 3.73 | 21,000 | 14,500 ² | 14,600 ² | 14,100 | 14,300/ 14,200 ^{2,3} | 14,300/ 14,200 ² | 14,400 | 14,200/ 14,100 ² | 14,300 | 13,800 | 14,000/ 13,900 ^{2,3} | 13,800/ 13,700 ^{2,3} | 13,900 | 14,200/ 14,100 ² | 14,300 | 14,000/ 13,900 ² | 14,100 | 13,800/ 13,700 ^{2,3} | 13,900 | 13,600/ 13,500 ^{2,3} | 13,700/ 13,600 ^{2,3} |
| | 4.30 | 24,400 | 17,900 ² | 18,000 ² | 17,500 | 17,700/ 17,600 ^{2,3} | 17,700/ 17,600 ² | 17,800 | | | 17,200 | 17,400/ 17,300 ^{2,3} | 17,200/ 17,100 ^{2,3} | 17,300 | 17,600/ 17,500 ² | 17,700 | 17,400/ 17,300 ² | 17,500 | | | 17,000/ 16,900 ^{2,3} | 17,100/ 17,000 ^{2,3} |
| 7.3L V8 | 3.73 | 25,200 | 18,500 ² | 18,600 ² | 18,200/ 18,100 ^{2,3} | 18,300 | 18,200 | 18,400/ 18,300 ² | 18,100 | 18,300/ 18,200 ² | 17,800 | 18,000/ 17,900 ^{2,3} | 17,800/ 17,700 ^{2,3} | 17,900 | 18,200/ 18,100 ² | 18,300 | 17,900 | 18,100/ 18,000 ² | 17,800/ 17,700 ^{2,3} | 17,900 | 17,600/ 17,500 ^{2,3} | 17,700 |
| | 28,600 | | | | | | | | | | | | | | | | | | 21,000 ⁴ | 21,000 ⁴ | | |
| | 4.30 | 29,000 | 22,300 ² | 22,400 ² | 22,000/ 21,900 ^{2,3} | 22,100 | 21,300/ 22,000 ² | 22,200/ 22,100 ² | 21,900 ² | 22,000 ² | 20,900/ 21,600 ^{2,3} | 21,800/ 21,700 ^{2,3} | 21,300/ 21,500 ^{2,3} | 21,700 | 21,100/ 21,900 ² | 22,100 | 21,100/ 21,700 ² | 21,900/ 21,800 ² | 20,900/ 21,500 ^{2,3} | 21,700 | 20,800/ 21,300 ^{2,3} | 21,500 |

Notes: • Combined weight of vehicle and trailer cannot exceed listed GCWR.

• Do not exceed the Maximum Loaded Trailer Weight listed.

• Conventional trailer tongue load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.

• Calculated with SAE J2807® method.

• Trailer towing values are the same for weight-carrying and weight-distributing hitches.

• If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

Metric Conversion – To obtain information in kilograms, multiply pounds by .45;
to obtain information in centimeters, multiply inches by 2.54.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. 18" All-Season Tires. 3. 18" and 20" All-Terrain Tires. 4. Tremor® Off-Road Package (17Y).



2026 F-450 XL Crew Cab in Carbonized Gray Metallic. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

F-350®/450® DRW Super Duty® Pickups

CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

Towing capability will vary based on trim series, option content and payload. Prior to making final vehicle selection, reference the Basic Towing Information on page 9. See dealer and reference “Ford University” Job Aid “Spec’ing F-Series Trucks for Towing”.

| | | | REGULAR CAB | | | | CREW CAB | | | |
|---------------------------|------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Automatic Transmission | | | F-350 | F-350 | F-450 | F-450 | F-350 | F-350 | F-450 | F-450 |
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 176.0" WB 8' Box | 4x4 176.0" WB 8' Box | 4x2 176.0" WB 8' Box | 4x4 176.0" WB 8' Box |
| 6.7L V8 Turbo Diesel | 3.55 | 40,000 | 24,800/18,200 | 24,800 | | | 27,000 | 27,000 | | |
| | 4.10 | 43,900 | 24,800/18,200 | 24,800 | | | 27,000 | 27,000 | | |
| | 4.30 | 43,500 | | | | | | | 30,000 | 30,000 |
| | | 46,700 | | | 25,000 | 25,000 | | | | |
| 6.7L V8 H.O. Turbo Diesel | 3.55 | 40,500 | 24,800 | 24,800 | | | 27,000 | 27,000 | | |
| | 4.10 | 45,600 | 24,800 | 24,800 | | | 28,000 | 28,000 | | |
| | 4.30 | 43,500 | | | | | | | 30,000 | 30,000 |
| | | 46,700 | | | 25,000 | 25,000 | | | | |
| | | 48,000³ | | | 18,200 | | | | | |
| 6.8L V8 | 4.30 | 25,400 | 18,700/18,200² | 18,300 | | | | 17,700 | | |
| 7.3L V8 | 3.73 | 25,700 | 18,900 | 18,500 | | | | 17,900 | | |
| | 4.30 | 29,500 | 22,000 | 22,000 | | | | 21,700 | | |

5TH-WHEEL/GOOSENECK TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

| | | | REGULAR CAB | | | | CREW CAB | | | |
|---------------------------|------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Automatic Transmission | | | F-350 | F-350 | F-450 | F-450 | F-350 | F-350 | F-450 | F-450 |
| | | | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 141.6" WB 8' Box | 4x4 141.6" WB 8' Box | 4x2 176.0" WB 8' Box | 4x4 176.0" WB 8' Box | 4x2 176.0" WB 8' Box | 4x4 176.0" WB 8' Box |
| Engine | Axle Ratio | GCWR (lbs.) | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck | 5th-Wheel | Goose-neck |
| 6.7L V8 | 3.55 | 40,000 | 32,300/32,400 | 32,400/32,600 | 31,900 | 32,000 | | | 31,600 | 31,800 |
| | 4.10 | 43,900 | 35,000/35,000 | 36,300/36,500 | 35,000 | 35,900 | | | 35,000 | 35,300 |
| | 4.30 | 43,500 | | | | | | | | |
| | | 46,700 | | | 35,000 | 38,600 | 35,000 | 37,200 | | |
| 6.7L V8 H.O. Turbo Diesel | 3.55 | 40,500 | 32,800 | 32,900 | 32,300 | 32,500 | | | 32,100 | 32,300 |
| | 4.10 | 45,600 | 35,000 | 38,000 | 35,000 | 37,600 | | | 35,000 | 37,400 |
| | 4.30 | 43,500 | | | | | | | | |
| | | 46,700 | | | 35,000 | 38,600 | 35,000 | 37,100 | | |
| | | 48,000³ | | | 35,000 | 40,000 | | | | |
| 6.8L V8 | 4.30 | 25,400 | 18,500/18,700² | 18,600/18,900² | 18,100 | 18,200 | | | 17,400 | 17,600 |
| 7.3L V8 | 3.73 | 25,700 | 18,700 | 18,800 | 18,200 | 18,400 | | | 17,600 | 17,800 |
| | 4.30 | 29,500 | 22,500 | 22,500 | 22,000 | 22,200 | | | 21,400 | 21,600 |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Conventional trailer tongue load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Calculated with SAE J2807® method.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Heavy Duty Payload Package (68F). 3. 40k Gooseneck Tow Package (535).

SUPER DUTY® PICKUP/ CAMPER COMBINATION SELECTOR

Combined weight of vehicle, camper body, occupants and cargo must not exceed Gross Vehicle Weight Rating (GVWR).

Cargo Weight Rating shown in chart is maximum allowable, assuming weight of a base vehicle with required camper option content and a 150-lb. passenger at each available seating position.

Ratings also assume weight of engine and standard transmission. Cargo Weight Rating shown must be further reduced by weight of transmission upgrade and any other options. Option weights and center-of-gravity information are available on the Ford Pickup Truck Consumer Information Sheet.

CAMPER CENTER-OF-GRAVITY

All Ford pickups that qualify for slide-in camper bodies have camper center-of-gravity included on the Consumer Information Sheet in the glovebox.

Data is calculated for each individual truck, based on vehicle options.

If vehicle does not qualify for camper use, the Consumer Information Sheet states that the vehicle is not recommended for camper use and no center-of-gravity data is shown.

SLIDE-IN CAMPER INSTALLATION

Consult your camper manufacturer/dealer for details regarding proper installation of your slide-in camper.

A dimensionally stable block spacer is recommended between the headboard of the pickup box and the forward edge of the camper floor. Resting the spacer on the pickup box bed helps prevent movement and contact of the fully-installed camper with the pickup box headboard or taillight rear pillars.

Note: Be sure to measure your slide-in camper before attempting to install it onto the truck bed. Some campers may require a platform in the bed of the truck to make sure there is adequate clearance for both the box rails and cab roof of the truck.

F-250®/F-350®/F-450® SUPER DUTY CAMPER PACKAGE (OPTION CODE 471)

Increased capacity front springs (2 Up [4x2] or 1 Up [4x4] upgrade over springs, computer-selected based on options ordered. Not included if maximum springs have been computer-selected as standard equipment).

Rear stabilizer bar (SRW)

Rear auxiliary springs (F-250; standard on F-350)

Slide-in camper certification

Tailgate delete cap kit

Available on XL, XLT, Lariat, King Ranch® (DRW only), and Platinum (DRW only)

MAXIMUM CARGO WEIGHT WITH SLIDE-IN CAMPER

Note: This chart lists GVWRs and Maximum Cargo Weights (with minimum equipment) by engine for each approved pickup model: 6.8L V8, 7.3L V8, 6.7L Power Stroke® Turbo Diesel V8 and H.O. 6.7L Power Stroke Turbo Diesel V8.

| F-250 Super Duty ² | Wheelbase | GVWR (lbs.) | | | | Maximum Cargo Weight Rating (lbs.) ¹ | | | |
|--|-----------|-------------|--------|---------------------|---------------------|---|-----------------------------|-----------------------------|-----------------------------|
| | | 6.8L | 7.3L | 6.7L | 6.7L H.O. | 6.8L Std./Opt. ⁴ | 7.3L Std./Opt. ⁴ | 6.7L Std./Opt. ⁴ | 6.7L H.O./Opt. ⁴ |
| 4x2 Reg. Cab | 141.6" | 10,000 | 10,000 | 10,000 | 10,600 ³ | 3,794/3,694 | 3,800/3,700 | 3,036/2,936 | 3,535/ - |
| 4x2 Reg. Cab | 141.6" | - | - | 10,600 ³ | - | - / - | - / - | 3,550/ - | - / - |
| 4x2 Reg. Cab | 141.6" | - | - | 10,600 | - | - / - | - / - | 3,636/ - | - / - |
| 4x2 SuperCab | 148.0" | 10,000 | 10,000 | - | - | 3,046/ - | 3,072/ - | - / - | - / - |
| 4x2 SuperCab | 148.0" | 10,100 | 10,100 | - | - | 3,146/ - | 3,172/ - | - / - | - / - |
| 4x2 SuperCab | 148.0" | - | - | 10,700 ³ | 10,700 ³ | - / - | - / - | 2,913/ - | 2,898/ - |
| 4x2 SuperCab | 148.0" | 9,900 | 9,900 | - | - | - /2,946 | - /2,972 | - / - | - / - |
| 4x2 SuperCab | 164.2" | 10,000 | 10,000 | 10,000 | 11,000 ³ | 2,967/2,867 | 2,964/2,854 | 2,170/2,070 | 3,069/ - |
| 4x2 SuperCab | 164.2" | - | - | 11,000 ³ | - | - / - | - / - | 3,084/ - | - / - |
| 4x2 SuperCab | 164.2" | 10,400 | 10,400 | 10,600 | - | 3,367/ - | 3,364/ - | 2,770/ - | - / - |
| 4x2 SuperCab | 159.8" | 10,000 | 10,000 | 10,000 | 10,800 ³ | 3,000/2,900 | 3,027/2,927 | 2,206/2,106 | 2,905/ - |
| 4x2 Crew Cab | 159.8" | - | - | 10,800 ³ | - | - / - | - / - | 2,920/ - | - / - |
| 4x2 Crew Cab | 159.8" | 10,100 | 10,100 | 10,600 | - | 3,100/ - | 3,127/ - | 2,806/ - | - / - |
| 4x2 Crew Cab | 176.0" | 10,000 | 10,000 | 10,000 | 11,100 ³ | 2,777/2,677 | 2,803/2,703 | 1,959/1,859 | 2,958/ - |
| 4x2 Crew Cab | 176.0" | - | - | 11,100 ³ | - | - / - | - / - | 2,973/ - | - / - |
| 4x2 Crew Cab | 176.0" | 10,400 | 10,400 | 10,600 | - | 3,177/ - | 3,203/ - | 2,559/ - | - / - |
| 4x4 Reg. Cab | 141.6" | 10,000 | 10,000 | 10,000 | 11,000 ³ | 3,403/3,303 | 3,414/3,314 | 2,643/2,543 | 3,543/ - |
| 4x4 Reg. Cab | 141.6" | - | - | 11,000 ³ | - | - / - | - / - | 3,558/ - | - / - |
| 4x4 Reg. Cab | 141.6" | 10,300 | 10,300 | 10,600 | - | 3,703/ - | 3,714/ - | 3,243/ - | - / - |
| 4x4 SuperCab | 148.0" | 10,000 | 10,000 | 10,000 | - | 2,631/ - | 2,658/ - | 1,906/ - | - / - |
| 4x4 SuperCab | 148.0" | 10,400 | 10,400 | 10,600 | - | 3,031/ - | 3,058/ - | 2,506/ - | - / - |
| 4x4 SuperCab | 148.0" | - | - | 11,000 ³ | 11,000 ³ | - / - | - / - | 2,820/ - | 2,805/ - |
| 4x4 SuperCab | 148.0" | 9,900 | 9,900 | 9,900 | - | - /2,531 | - /2,558 | - /1,806 | - / - |
| 4x4 SuperCab | 164.2" | 10,000 | 10,000 | 10,000 | 11,400 ³ | 2,587/2,487 | 2,599/2,499 | 1,818/1,718 | 3,118/ - |
| 4x4 SuperCab | 164.2" | - | - | 11,200 ³ | - | - / - | - / - | 2,933/ - | - / - |
| 4x4 SuperCab | 164.2" | 10,600 | 10,600 | 10,600 | - | 3,187/ - | 3,199/ - | 2,418/ - | - / - |
| 4x4 Crew Cab | 159.8" | 10,000 | 10,000 | 10,000 | 11,100 ³ | 2,650/2,550 | 2,676/2,576 | 1,868/1,768 | 2,868/ - |
| 4x4 Crew Cab | 159.8" | - | - | 11,100 ³ | - | - / - | - / - | 2,883/ - | - / - |
| 4x4 Crew Cab | 159.8" | 10,500 | 10,500 | 10,600 | - | 3,150/ - | 3,176/ - | 2,468/ - | - / - |
| 4x4 Crew Cab | 176.0" | 10,000 | 10,000 | 10,000 | 11,400 ³ | 2,347/2,247 | 2,373/2,273 | 1,544/1,444 | 2,844/ - |
| 4x4 Crew Cab | 176.0" | - | - | 11,200 ³ | - | - / - | - / - | 2,659/ - | - / - |
| 4x4 Crew Cab | 176.0" | 10,600 | 10,600 | 10,600 | - | 2,947/ - | 2,973/ - | 2,144/ - | - / - |
| | | | | | | | | | |
| F-350 SRW Super Duty ² | Wheelbase | 6.8L | 7.3L | 6.7L | 6.7L H.O. | 6.8L Std. | 7.3L Std. | 6.7L Std. | 6.7L H.O. |
| 17" Tires | | | | | | | | | |
| 4x2 Reg. Cab | 141.6" | - | - | 10,600 | 10,600 | - | - | 3,580 | 3,565 |
| 4x2 SuperCab | 148.0" | 10,100 | 10,100 | 10,700 | - | 3,116 | 2,933 | 3,011 | - |
| 4x2 SuperCab | 164.2" | 10,400 | 10,400 | 11,000 | 11,000 | 3,334 | 3,122 | 3,090 | 3,075 |
| 4x2 Crew Cab | 159.8" | 10,200 | 10,200 | 10,800 | - | 3,131 | 2,948 | 2,906 | - |
| 4x2 Crew Cab | 176.0" | 10,600 | 10,600 | 11,100 | 11,100 | 3,315 | 3,133 | 2,969 | 2,984 |
| 4x4 Reg. Cab | 141.6" | 10,400 | 10,400 | 11,000 | 11,000 | 3,738 | 3,626 | 3,567 | 3,552 |
| 4x4 SuperCab | 148.0" | 10,500 | 10,500 | 11,000 | 11,000 | 3,094 | 2,912 | 2,899 | 2,883 |
| 4x4 SuperCab | 164.2" | 10,800 | 10,800 | 11,300 | 11,300 | 3,357 | 3,175 | 3,029 | 2,998 |
| 4x4 Crew Cab | 159.8" | 10,600 | 10,600 | 11,200 | 11,200 | 3,150 | 2,968 | 2,917 | 2,902 |
| 4x4 Crew Cab | 176.0" | 10,900 | 10,900 | 11,499 | 11,499 | 3,216 | 3,073 | 2,969 | 2,954 |
| 18" All-Season Tires | | | | | | | | | |
| 4x2 Reg. Cab | 141.6" | 10,500 | 10,500 | 11,100 | 11,100 | 4,229 | 4,015 | 4,022 | 4,007 |
| 4x2 SuperCab | 148.0" | 10,600 | 10,600 | 11,200 | - | 3,586 | 3,373 | 3,454 | - |
| 4x2 SuperCab | 164.2" | 10,900 | 10,900 | 11,499 | 11,499 | 3,807 | 3,565 | 3,531 | 3,516 |
| 4x2 Crew Cab | 159.8" | 10,600 | 10,700 | 11,300 | - | 3,504 | 3,390 | 3,348 | - |
| 4x2 Crew Cab | 176.0" | 11,100 | 11,100 | 11,499 | 11,499 | 3,788 | 3,575 | 3,310 | 3,325 |
| 4x4 Reg. Cab | 141.6" | 10,900 | 10,900 | 11,499 | 11,499 | 4,211 | 4,068 | 4,008 | 3,993 |
| 4x4 SuperCab | 148.0" | 10,900 | 11,000 | 11,499 | 11,499 | 3,468 | 3,355 | 3,340 | 3,324 |
| 4x4 SuperCab | 164.2" | 11,300 | 11,300 | 11,499 | 11,499 | 3,830 | 3,617 | 3,170 | 3,139 |
| 4x4 Crew Cab | 159.8" | 11,000 | 11,100 | 11,499 | 11,499 | 3,523 | 3,410 | 3,158 | 3,143 |
| 4x4 Crew Cab | 176.0" | 11,300 | 11,300 | 12,000 | 12,000 | 3,589 | 3,415 | 3,412 | 3,397 |
| 18"/20" All-Terrain and 20" All-Season Tires | | | | | | | | | |
| 4x4 Reg. Cab | 141.6" | 11,400 | 11,400 | 12,000 | 12,000 | 4,706 | 4,563 | 4,504 | 4,489 |
| 4x4 SuperCab | 148.0" | 11,400 | 11,400 | 12,000 | 12,000 | 3,963 | 3,750 | 3,837 | 3,821 |
| 4x4 SuperCab | 164.2" | 11,800 | 11,800 | 12,300 | 12,300 | 4,325 | 4,112 | 3,966 | 3,935 |
| 4x4 Crew Cab | 159.8" | 11,499 | 11,499 | 12,000 | 12,000 | 4,017 | 3,804 | 3,654 | 3,639 |
| 4x4 Crew Cab | 176.0" | 11,900 | 11,900 | 12,400 | 12,400 | 4,184 | 4,010 | 3,807 | 3,792 |
| | | | | | | | | | |
| F-350 DRW Super Duty ² | Wheelbase | 6.8L | 7.3L | 6.7L | 6.7L H.O. | 6.8L Std. | 7.3L Std. | 6.7L Std. | 6.7L H.O. |
| 4x2 Reg. Cab | 141.6" | 14,000 | 14,000 | 14,000 | 14,000 | 7,344 | 7,236 | 6,558 | 6,542 |
| 4x2 Crew Cab | 176.0" | - | - | 14,000 | 14,000 | - | - | 5,437 | 5,423 |
| 4x4 Reg. Cab | 141.6" | 14,000 | 14,000 | 14,000 | 14,000 | 6,943 | 6,807 | 6,129 | 6,114 |
| 4x4 Crew Cab | 176.0" | 14,000 | 14,000 | 14,000 | 14,000 | 5,864 | 5,758 | 5,030 | 5,015 |
| | | | | | | | | | |
| F-450 DRW Super Duty ² | Wheelbase | 6.8L | 7.3L | 6.7L | 6.7L H.O. | 6.8L Std. | 7.3L Std. | 6.7L Std. | 6.7L H.O. |
| 4x2 Reg. Cab | 141.6" | - | - | 14,000 | 14,000 | - | - | 5,933 | 5,917 |
| 4x2 Crew Cab | 176.0" | - | - | 14,000 | 14,000 | - | - | 4,818 | 4,803 |
| 4x4 Reg. Cab | 141.6" | - | - | 14,000 | 14,000 | - | - | 5,567 | 5,552 |
| 4x4 Crew Cab | 176.0" | - | - | 14,000 | 14,000 | - | - | 4,488 | 4,473 |

If you intend to pull a trailer in addition to carrying your camper, see the Super Duty Pickup Trailer Towing Selector charts on pages 20, 22 and 24.

1. Maximum cargo weight capabilities requires Camper Package (471) and are exclusive of the weight of the occupants in the vehicle, computed as 150-lbs. times the number of designated seating positions, and vary based on cargo, vehicle configuration, accessories, and option content. See Truck Camper Loading document provided with the vehicle for carrying capacity of a specific vehicle. For additional information, see your Ford Dealer. 2. Requires Camper Package option. 3. With Trailer Tow Package. 4. With available 9,900-lb. GVWR Package.

Super Duty® Pickups

REQUIRED EQUIPMENT

F-250 Pickup

For conventional towing greater than 18,200 lbs. – High-Capacity Axle Upgrade Package (535) required with 18" All-Season or 20" All-Terrain Tires

Your New Vehicle Limited Warranty may be voided if you tow without this.¹

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **F-250®/F-350®/F-450® Super Duty**/trailer combination is **75 sq. ft. all 5th-wheel and gooseneck applications** and **60 sq. ft. all other applications**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

A 2.5" hitch receiver is standard on all models except for the following configurations which get a 3" hitch receiver:

- F-350 DRW Crew Cab with 6.7L H.O. Diesel engine with 4.10 FDR (Final Drive Ratio)
- F-450 Crew Cab with 6.7L and 6.7L H.O. Diesel engines

See Hitch Receiver Weight Capacity chart for the weight-carrying and weight-distributing capacities of these hitch receivers. (These capacities also are shown on a label affixed to each receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector charts for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ² | Max. Tongue Load (lbs.) | Weight-Distributing Max. Trailer Capacity (lbs.) ² | Max. Tongue Load (lbs.) |
|---------------------|--|----------------------------|--|----------------------------|
| F-250 | 22,000 | 2,200 | 22,000 | 2,200 |
| F-350 SRW | 25,000 | 2,500 | 25,000 | 2,500 |
| F-250/F-350 Tremor® | 18,200 | 1,820 | 18,200 | 1,820 |
| F-350 DRW | 28,000 | 2,800 | 28,000 | 2,800 |
| F-450 DRW | 30,000 | 3,000 | 30,000 | 3,000 |

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Limited Slip | Electronic Locking |
|--------------------|---------------------|-----------------|-----------------------|
| 3.31 | 31 | Not Available | 3H |
| 3.55 | 35 | 3K | 3J |
| 3.73 | 37 | 3L | 3E |
| 4.10 | Not Available | 4N | Not Available |
| 4.30 | Not Available | 4L | 4M |

Metric Conversion – To obtain information in kilograms, multiply pounds by .45.

¹ See your Ford Dealer for limited warranty details. ² Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, weight-distributing equipment (i.e., equalizing arms and snap-up brackets, sway control system) and other appropriate equipment to tow both the trailer and its cargo load.



2026 Ranger Lariat SuperCrew 4x4 with FX4 package in Carbonized Gray Metallic. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Ranger®

Automatic Transmission

MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

| Engine | Axle Ratio | GCWR (lbs.) | SUPERCREW® | | |
|-------------------------------|------------|-------------|--------------------|--------------------|--------------------|
| | | | 4x2 | 4x4 | 4x4 AUTO |
| 2.3L EcoBoost® I4 | 3.73 | 12,370 | 7,500 ² | | |
| | | 12,590 | | 7,500 ² | |
| 2.7L EcoBoost V6 | 3.73 | 12,745 | | 7,500 ² | |
| 3.0L EcoBoost V6 ³ | 4.27 | 11,465 | | | 5,510 ² |

Notes:

- Do not exceed trailer weight of 3,500 lbs. when towing with bumper only.
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
- Do not exceed the Maximum Loaded Trailer Weight listed.
- Ranger calculated with SAE J2807® method.

REQUIRED EQUIPMENT

For trailers over 3,500 pounds – Trailer Tow Package (53R)

Your New Vehicle Limited Warranty may be voided if you tow without this.⁴

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Ranger/trailer combination is 30 sq. ft. without Trailer Tow Package and 55 sq. ft. with Trailer Tow Package.** Exceeding this limitation may significantly reduce the performance of your towing vehicle.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Electronic Locking |
|-------------------|------------------|--------------------|
| 3.73 | 71 | 73 |
| 4.27 ³ | Not Available | 4L |

AVAILABLE TRAILER TOW PACKAGES

| Equipment | (53R) | (67P) | (67G) | Raptor® (NOC) |
|--|----------------|----------------|----------------|----------------|
| 4-/7-Pin Connector | I | I | I | S |
| Class IV Hitch Receiver | I | I | I | S |
| Trailer Brake Controller | | I | I | S |
| Pro Trailer Backup Assist™ | | I | I | S |
| Reverse Parking Sensors w/Trailer Guidance | | | I | S |
| 360-Degree Camera | | | I ⁵ | S |
| Tow/Haul Mode | S | S | S | S |
| Tow Hooks Front (4x4) | S ⁶ | S ⁶ | S ⁶ | S ⁶ |
| Trailer Sway Control | S | S | S | S |
| Lane Keeping Alert | S | S | S | S |

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

LEGEND

I = Equipment is included in the package
S = Equipment is standard on the vehicle
NOC = No Option Code assigned

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Included with Trailer Tow Package – Option Code 53R

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

REAR STEP BUMPER/HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for this vehicle.

| | | Weight-Carrying Max. Trailer Capacity (lbs.) ⁷ | Max. Tongue Load (lbs.) |
|-------------------------|---------------|---|-------------------------|
| REAR STEP BUMPER | Ranger | 3,500 | 350 |
| HITCH RECEIVER | Ranger | 7,500 ² | 750 |
| | Ranger Raptor | 5,510 ² | 550 |

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires available Trailer Tow Package (53R); standard on Raptor. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories and number of passengers. 3. Raptor only. 4. See your Ford Dealer for limited warranty details. 5. Standard on Lariat for 67W. 6. 4x4 only. 7. Ford rear step bumpers and hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load.



2026 Maverick Lariat SuperCrew with optional equipment in extra-cost color Ruby Red Metallic Tinted Clearcoat. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Maverick®

| Automatic Transmission | | | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ | |
|------------------------|------------|-------------|---|--------------------|
| Engine | Axle Ratio | GCWR (lbs.) | SUPERCREW® | |
| | | | FWD | AWD |
| 2.5L I4 Hybrid | 3.37 | 6,090 | 2,000 | |
| | | 6,315 | | 2,000 |
| | | 8,315 | | 4,000 ² |
| 2.0L EcoBoost® I4 | 3.81 | 5,945 | 2,000 | |
| | | 6,130 | | 2,000 |
| | | 6,255 | | 2,000 |
| | | 8,130 | | 4,000 ² |

Notes: • Combined weight of vehicle and trailer cannot exceed listed GCWR.
• Do not exceed the Maximum Loaded Trailer Weight listed.
• Maverick calculated with SAE J2807® method.

REQUIRED EQUIPMENT

For trailers over 2,000 lbs. – 4K Tow Package (53Q)

Your New Vehicle Limited Warranty may be voided if you tow without this.³

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Maverick/trailer combination is 29 sq. ft. without 4K Tow Package (53Q) and 40 sq. ft. with 4K Tow Package (53Q).** Exceeding this limitation may significantly reduce the performance of your towing vehicle.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45.

AVAILABLE 4K TRAILER TOW PACKAGE

| Equipment | Maverick (53Q) |
|--|----------------|
| 4-/7-Pin Connector | I |
| Hitch Receiver (Class III) | I |
| Aux. Auto Trans. Oil Cooler (2.5L Hybrid only) | I |
| Radiator Upgrade (2.0L Gas Only) | I |
| Upgraded Cooling Fan | I |
| Tow/Haul Mode | S |
| Trailer Brake Controller | I |
| Trailer Sway Control | S |

LEGEND
I = Equipment is included in the package
S = Equipment is standard on the vehicle

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Included with 4K Trailer Tow Package – Option Code 53Q

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacity for the hitch receiver shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for this vehicle.

| Weight-Carrying Max. Trailer Capacity (lbs.) ⁴ | Max. Tongue Load (lbs.) |
|---|-------------------------|
| 4,000 ² | 400 |

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires 4K Tow Package (53Q). When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories and number of passengers. 3. See your Ford Dealer for limited warranty details. 4. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load.

COMMERCIAL VEHICLES



**Ford Commercial Vehicles help you get down
to business with trucks and vans built to
accelerate your productivity.**

F-350® Super Duty® Chassis Cab

MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

CONVENTIONAL TOWING²

Trailer weights shown assume 715-lb.–1,115-lb. second-unit body weight.

| Automatic Transmission | | | REGULAR CAB CHASSIS | | | | | | SUPERCAB CHASSIS | | | | CREW CAB CHASSIS | | | |
|------------------------|------------|-------------|---------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 SRW 145.3" WB | 4x4 SRW 145.3" WB | 4x2 DRW 145.3" WB | 4x2 DRW 169.3" WB | 4x4 DRW 145.3" WB | 4x4 DRW 169.3" WB | 4x2 SRW 167.9" WB | 4x4 SRW 167.9" WB | 4x2 DRW 167.9" WB | 4x4 DRW 167.9" WB | 4x2 SRW 179.8" WB | 4x4 SRW 179.8" WB | 4x2 DRW 179.8" WB | 4x4 DRW 179.8" WB |
| 6.7L V8 Diesel | 3.73 | 31,000 | | 13,500 | | | | | | 13,500 | | | 13,500 | 13,500 | | |
| | | 34,000 | | | 17,500 | 17,500 | 17,500 | 17,500 | | | | 17,500 | | | 17,500 | 17,500 |
| 7.3L V8 | 4.10 | 34,500 | | | 17,500 | 17,500 | 17,500 | 17,500 | | | | 17,500 | | | 17,500 | 17,500 |
| | 3.73 | 23,500 | | | 16,400 | 16,100 | 16,000 | 15,700 | | | 15,900 | 15,600 | | | 15,900 | 15,500 |
| | 4.30 | 27,200 | 13,500 | 13,500 | | | | | 13,500 | 13,500 | | | 13,500 | 13,500 | | |
| | | 27,500 | | | 17,500 | 17,500 | 17,500 | 17,500 | | | 17,500 | 17,500 | | | 17,500 | 17,500 |

5TH-WHEEL TOWING

| | | | | | | | | | | | | | | | | |
|----------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 3.73 | 31,000 | | 22,700 | | | | | | 20,100 | | | 21,100 | 19,600 | | |
| | | 34,000 | | | 26,000 | 25,800 | 25,600 | 25,400 | | | | 25,200 | | | 25,500 | 25,100 |
| | 4.10 | 34,500 | | | 26,500 | 26,300 | 26,100 | 25,900 | | | | 25,700 | | | 26,000 | 25,600 |
| 7.3L V8 | 3.73 | 23,500 | | | 16,200 | 16,000 | 15,900 | 15,600 | | | 15,800 | 15,400 | | | 15,700 | 15,300 |
| | 4.30 | 27,200 | 20,300 | 19,800 | | | | | 19,900 | 19,400 | | | 19,700 | 19,300 | | |
| | | 27,500 | | | 20,200 | 20,000 | 19,900 | 19,600 | | | 19,800 | 19,400 | | | 19,700 | 19,300 |

GOOSENECK TOWING

| | | | | | | | | | | | | | | | | |
|----------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 3.73 | 31,000 | | 23,100 | | | | | | 20,900 | | | 21,900 | 20,500 | | |
| | | 34,000 | | | 26,100 | 25,900 | 25,800 | 25,500 | | | | 25,300 | | | 25,600 | 25,200 |
| | 4.10 | 34,500 | | | 26,600 | 26,400 | 26,300 | 26,000 | | | | 25,800 | | | 26,100 | 25,700 |
| 7.3L V8 | 3.73 | 23,500 | | | 16,300 | 16,100 | 16,000 | 15,700 | | | 15,900 | 15,500 | | | 15,800 | 15,400 |
| | 4.30 | 27,200 | 20,400 | 20,000 | | | | | 20,000 | 19,600 | | | 19,900 | 19,400 | | |
| | | 27,500 | | | 20,300 | 20,100 | 20,000 | 19,700 | | | 19,900 | 19,500 | | | 19,800 | 19,400 |

F-450® Super Duty Chassis Cab

MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

CONVENTIONAL TOWING²

Trailer weights shown assume 715-lb.–1,115-lb. second-unit body weight.

| Automatic Transmission | | | REGULAR CAB CHASSIS | | | | | | | | SUPERCAB CHASSIS | | | | CREW CAB CHASSIS | | | |
|------------------------|------------|---------------------|---------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 DRW 145.3" WB | 4x2 DRW 169.3" WB | 4x2 DRW 193.3" WB | 4x2 DRW 205.3" WB | 4x4 DRW 145.3" WB | 4x4 DRW 169.3" WB | 4x4 DRW 193.3" WB | 4x4 DRW 205.3" WB | 4x2 DRW 167.9" WB | 4x2 DRW 192.0" WB | 4x4 DRW 167.9" WB | 4x4 DRW 192.0" WB | 4x2 DRW 179.8" WB | 4x2 DRW 203.8" WB | 4x4 DRW 179.8" WB | 4x4 DRW 203.8" WB |
| 6.7L V8 Diesel | 4.10 | 34,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 |
| | 4.30 | 39,000 ³ | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 |
| 7.3L V8 | 4.88 | 30,000 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 | 17,500 |

5TH-WHEEL TOWING

| | | | | | | | | | | | | | | | | | | |
|----------------|------|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 4.10 | 34,500 | 25,700 | 25,600 | 25,300 | 25,100 | 25,500 | 25,200 | 24,800 | 24,700 | | 25,100 | 25,100 | 24,800 | 25,300 | 24,900 | 24,900 | 24,700 |
| | 4.30 | 39,000 ³ | 30,200 | 30,100 | 29,800 | 29,600 | 30,000 | 29,700 | 29,300 | 29,200 | | 29,600 | 29,600 | 29,300 | 29,800 | 29,400 | 29,400 | 29,200 |
| 7.3L V8 | 4.88 | 30,000 | 22,000 | 21,800 | 21,500 | 21,300 | 21,700 | 21,400 | 21,100 | 21,000 | 21,600 | | 21,300 | 21,000 | 21,500 | 21,200 | 21,200 | 20,900 |

GOOSENECK TOWING

| | | | | | | | | | | | | | | | | | | |
|----------------|------|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 4.10 | 34,500 | 25,800 | 25,700 | 25,400 | 25,200 | 25,600 | 25,400 | 25,000 | 24,900 | | 25,200 | 25,200 | 24,900 | 25,400 | 25,000 | 25,100 | 24,900 |
| | 4.30 | 39,000 ³ | 30,300 | 30,200 | 29,900 | 29,700 | 30,100 | 29,900 | 29,500 | 29,400 | | 29,700 | 29,700 | 29,400 | 29,900 | 29,500 | 29,600 | 29,400 |
| 7.3L V8 | 4.88 | 30,000 | 22,100 | 21,900 | 21,600 | 21,400 | 21,900 | 21,600 | 21,200 | 21,100 | 21,700 | | 21,400 | 21,200 | 21,600 | 21,400 | 21,300 | 21,100 |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue (trailer king pin for 5th-wheel towing) load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Super Duty Chassis Cab does not offer a conventional hitch receiver as a factory-installed option. 3. Requires Trailer Tow Package – High Capacity (535).

F-550® Super Duty® Chassis Cab

MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

CONVENTIONAL TOWING²

Trailer weights shown assume 715-lb.-1,115-lb. second-unit body weight.

| Automatic Transmission | | | REGULAR CAB CHASSIS | | | | | | | | SUPERCAB CHASSIS | | | | CREW CAB CHASSIS | | | |
|------------------------|------------|-----------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 DRW 145.3" WB | 4x2 DRW 169.3" WB | 4x2 DRW 193.3" WB | 4x2 DRW 205.3" WB | 4x4 DRW 145.3" WB | 4x4 DRW 169.3" WB | 4x4 DRW 193.3" WB | 4x4 DRW 205.3" WB | 4x2 DRW 167.9" WB | 4x2 DRW 192.0" WB | 4x4 DRW 167.9" WB | 4x4 DRW 192.0" WB | 4x2 DRW 179.8" WB | 4x2 DRW 203.8" WB | 4x4 DRW 179.8" WB | 4x4 DRW 203.8" WB |
| 6.7L V8 Diesel | 4.10 | 34,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 |
| | 4.30 | 39,000 ³ | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 | 18,500 |
| | | 43,000 ^{3,5} | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 | 19,500 |
| 7.3L V8 | 4.88 | 30,000 | 18,500/ 19,500 ⁴ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ | 18,500/ 19,500 ⁵ |

5TH-WHEEL TOWING

| | | | | | | | | | | | | | | | | | | |
|----------------|------|-----------------------|--------------------------------|--------------------------------|--------------------------------|--------|--------|--------------------------------|--------------------------------|--------------------------------|--------|--------|--------------------------------|--------|--------------------------------|--------|--------------------------------|--------------------------------|
| 6.7L V8 Diesel | 4.10 | 34,500 | 25,700 | 25,600 | 25,300 | 25,100 | 25,500 | 25,200 | 24,800 | 24,700 | | 25,100 | 25,100 | 24,800 | 25,300 | 24,900 | 24,900 | 24,700 |
| | 4.30 | 39,000 ³ | 30,200 | 30,100 | 29,800 | 29,600 | 30,000 | 29,700 | 29,300 | 29,200 | | 29,600 | 29,600 | 29,300 | 29,800 | 29,400 | 29,400 | 29,200 |
| | | 43,000 ^{3,5} | 34,200 | 34,000 | 33,600 | 33,500 | 34,000 | 33,700 | 33,300 | 33,200 | | 33,500 | 33,500 | 33,200 | 33,700 | 33,500 | 33,400 | 33,100 |
| 7.3L V8 | 4.88 | 30,000 | 22,000/ 21,900 ⁴ | 21,800/ 21,700 ⁵ | 21,500/ 21,400 ⁵ | 21,300 | 21,700 | 21,400/ 21,300 ⁵ | 21,100/ 21,000 ⁵ | 21,000/ 20,900 ⁵ | 21,600 | | 21,300/ 21,200 ⁵ | 21,000 | 21,500/ 21,400 ⁵ | 21,200 | 21,200/ 21,100 ⁵ | 20,900/ 20,800 ⁵ |

GOOSENECK TOWING

| | | | | | | | | | | | | | | | | | | |
|----------------|------|-----------------------|--------|--------------------------------|--------------------------------|--------|--------------------------------|--------------------------------|--------|--------------------------------|--------|--------|--------|--------------------------------|--------|--------------------------------|--------|--------------------------------|
| 6.7L V8 Diesel | 4.10 | 34,500 | 25,800 | 25,700 | 25,400 | 25,200 | 25,600 | 25,400 | 25,000 | 24,900 | | 25,200 | 25,200 | 24,900 | 25,400 | 25,000 | 25,100 | 24,900 |
| | 4.30 | 39,000 ³ | 30,300 | 30,200 | 29,900 | 29,700 | 30,100 | 29,900 | 29,500 | 29,400 | | 29,700 | 29,700 | 29,400 | 29,900 | 29,500 | 29,600 | 29,400 |
| | | 43,000 ^{3,5} | 34,300 | 34,100 | 33,800 | 33,700 | 34,200 | 33,800 | 33,500 | 33,300 | | 33,700 | 33,600 | 33,400 | 33,800 | 33,600 | 33,500 | 33,300 |
| 7.3L V8 | 4.88 | 30,000 | 22,100 | 21,900/ 21,800 ⁵ | 21,600/ 21,500 ⁵ | 21,400 | 21,900/ 21,800 ⁴ | 21,600/ 21,500 ⁵ | 21,200 | 21,100/ 21,000 ⁵ | 21,700 | | 21,400 | 21,200/ 21,100 ⁵ | 21,600 | 21,400/ 21,300 ⁴ | 21,300 | 21,100/ 21,000 ⁵ |

F-600® Super Duty Chassis Cab

MAXIMUM LOADED TRAILER WEIGHT (lbs.)¹

CONVENTIONAL TOWING²

Trailer weights shown assume 715-lb.-1,115-lb. second-unit body weight.

| Automatic Transmission | | | REGULAR CAB CHASSIS | | | | | | | |
|------------------------|------------|-------------|---------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Engine | Axle Ratio | GCWR (lbs.) | 4x2 DRW 145.3" WB | 4x2 DRW 169.3" WB | 4x2 DRW 193.3" WB | 4x2 DRW 205.3" WB | 4x4 DRW 145.3" WB | 4x4 DRW 169.3" WB | 4x4 DRW 193.3" WB | 4x4 DRW 205.3" WB |
| 6.7L V8 Diesel | 4.30 | 43,500 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 |
| 7.3L V8 | 4.88 | 31,500 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 |

5TH-WHEEL TOWING

| | | | | | | | | | | |
|----------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 4.30 | 43,500 | 34,600 | 34,300 | 34,100 | 33,800 | 34,300 | 34,000 | 33,700 | 33,600 |
| 7.3L V8 | 4.88 | 31,500 | 23,300 | 23,000 | 22,800 | 22,600 | 23,000 | 22,700 | 22,500 | 22,300 |

GOOSENECK TOWING

| | | | | | | | | | | |
|----------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 6.7L V8 Diesel | 4.30 | 43,500 | 34,700 | 34,400 | 34,300 | 33,900 | 34,400 | 34,200 | 33,900 | 33,800 |
| 7.3L V8 | 4.88 | 31,500 | 23,400 | 23,100 | 23,000 | 22,700 | 23,100 | 22,800 | 22,600 | 22,400 |

- Notes:**
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Trailer tongue (trailer king pin for 5th-wheel towing) load weight should be 10% (15% for 5th-wheel and gooseneck towing) of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue (trailer king pin for 5th-wheel towing) load weight and weight of passengers and cargo must not cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Trailer towing values are the same for weight-carrying and weight-distributing hitches.
 - If using load bars for weight distribution, Ford recommends 50% front axle load restoration (FALR).

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Super Duty Chassis Cab does not offer a conventional hitch receiver as a factory-installed option. 3. Requires Trailer Tow Package – High Capacity (535). 4. Payload Upgrade Package. 5. Payload Plus Upgrade Package.



2026 F-450 XLT Chassis Cab in Oxford White. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Super Duty® Chassis Cabs

AVAILABLE HIGH-CAPACITY TRAILER TOW PACKAGE

| Equipment | F-450/F-550 Super Duty Chassis Cab (535) ¹ |
|--|---|
| 7-Wire Harness (Blunt Cut) with Relays | S |
| Tailer Brake Wiring/Feed Kit | I |
| Trailer Brake Controller (TBC) | S ² |
| Upgraded Rear Axle | I |
| Increased GCW (6.7L) | I |
| Tow/Haul Mode | S |
| Tow Hooks, Front | S |
| Trailer Sway Control | S |
| Lane Keeping Alert | S |

LEGEND
I = Equipment is included in the package
S = Equipment is standard on the vehicle

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

REQUIRED EQUIPMENT

F-450/F-550 Chassis Cab

For 43,000-lb. GCWR on F-550; 39,000-lb. GCWR on F-450 – High-Capacity Trailer Tow Package (535)

Your New Vehicle Limited Warranty may be voided if you tow without this.³

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **F-350®/F-450®/F-550®/F-600® Super Duty**/trailer combination is **75 sq. ft. for all 5th-wheel and gooseneck applications** and **60 sq. ft. for all other applications**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Limited Slip | Electronic Locking |
|-----------------|------------------|--------------------|--------------------|
| 3.73 | 37 | Not Available | 3E |
| 4.10 | 41 | 4N/4W ⁴ | Not Available |
| 4.30 | Not Available | 4L/4X ⁵ | 4M |
| 4.88 | 48 | 8L | Not Available |

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in square meters, multiply square feet by .09; to obtain information in centimeters, multiply inches by 2.54; to obtain information in kilometers, multiply miles by 1.6.

1. Requires 6.7L diesel engine. 2. Optional on XL. Standard on XLT and Lariat. 3. See your Ford Dealer for limited warranty details. 4. Wide rear axle on F-350 DRW Chassis Cab with Ambulance Package and 6.7L diesel engine. 5. Wide rear axle on F-350 DRW Chassis Cab with Ambulance Package and 7.3L gas engine.



2026 F-750 Regular Cab in Agate Black

Medium Duty Truck

DIESEL ENGINE

| Model | GVWR | GCWR |
|------------------------|--------------------|-------------|
| F-650 (Straight Frame) | 22,000-29,000 lbs. | 50,000 lbs. |
| F-750 (Straight Frame) | 25,999-37,000 lbs. | 50,000 lbs. |

GAS ENGINE

| Model | GVWR | GCWR |
|------------------------|--------------------|-------------|
| F-650 (Straight Frame) | 22,000-29,000 lbs. | 37,000 lbs. |
| F-750 (Straight Frame) | 25,999-37,000 lbs. | 37,000 lbs. |

Note: Combined weight of vehicle and trailer cannot exceed listed GCWR.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6; to obtain information in centimeters, multiply feet by 30.48.



2026 T-150 Cargo Van Medium Roof in Oxford White

Transit®

PASSENGER VAN

| CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ | | | | | | | | | | |
|---|------------------------|------------------|--------------------------|-------------------|----------------------------|------------------|---------------------|-------------------|-------------------|----------------------------|
| REAR-WHEEL DRIVE | | | | | | | | | | |
| ALL-WHEEL DRIVE | | | | | | | | | | |
| Automatic Transmission | | 350 | 350 | 350 | 350 | 350 | 350 | 350 | 350 | 350 |
| Engine | Axle GCWR Ratio (lbs.) | 148" WB Low Roof | 148" WB Medium Roof | 148" WB High Roof | 148" WB Extended High Roof | 148" WB Low Roof | 148" WB Medium Roof | 148" WB High Roof | 148" WB High Roof | 148" WB Extended High Roof |
| 3.5L PFDI V6 | 3.73 10,800 | 4,200 | 4,100/4,000 ² | 3,900 | | 4,000 | 3,800 ² | 3,700 | | |
| | 4.10 11,200 | 4,500 | 4,400/4,300 ² | 4,200 | | 4,300 | 4,100 | 4,000 | | |
| 3.5L EcoBoost® V6 | 3.73 11,200 | 4,400 | 4,300 | 4,100 | 3,600 | 4,200 | 4,100 | 3,900 | | 3,300 |

CARGO VAN

| CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ | | | | | | | | | | | | |
|---|------------------------|------------------|------------------|------------------|---------------------|---------------------|-------------------|-------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| REAR-WHEEL DRIVE | | | | | | | | | | | | |
| Automatic Transmission | | 150/250/350 | 150/250/350 | 350HD | 150/250/350 | 350HD | 250/350 | 350HD | 250/350 | 350HD | 350HD DRW | 350HD DRW |
| Engine | Axle GCWR Ratio (lbs.) | 130" WB Low Roof | 148" WB Low Roof | 148" WB Low Roof | 148" WB Medium Roof | 148" WB Medium Roof | 148" WB High Roof | 148" WB High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof |
| 3.5L PFDI V6 | 3.73 10,800 | 5,300 | 5,200 | | 5,000 | | 4,900 | | | | | |
| | 4.10 12,000 | 6,400 | 6,300 | 6,300 | 6,100 | 6,100 | 6,000 | 6,000 | 5,800 | 5,800 | | 5,600 |
| 3.5L EcoBoost V6 | 3.73 12,600 | 6,900 | 6,800 | 6,800 | 6,700 | 6,700 | 6,600 | 6,600 | 6,400 | | | |
| | 13,000 | | | | | | | | | 6,700 | | 6,600 |

| CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ | | | | | | | | | | | | |
|---|------------------------|------------------|------------------|------------------|---------------------|---------------------|-------------------|-------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| ALL-WHEEL DRIVE | | | | | | | | | | | | |
| Automatic Transmission | | 150/250/350 | 150/250/350 | 350HD | 150/250/350 | 350HD | 250/350 | 350HD | 250/350 | 350HD | 350HD DRW | 350HD DRW |
| Engine | Axle GCWR Ratio (lbs.) | 130" WB Low Roof | 148" WB Low Roof | 148" WB Low Roof | 148" WB Medium Roof | 148" WB Medium Roof | 148" WB High Roof | 148" WB High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof | 148" WB Extended High Roof |
| 3.5L PFDI V6 | 3.73 10,800 | 5,100 | 5,000 | | 4,800 | | 4,700 | | | | | |
| | 4.10 12,000 | 6,200 | 6,100 | 6,100 | 5,900 | 5,900 | 5,800 | 5,800 | 5,600 | 5,600 | | 5,400 |
| 3.5L EcoBoost V6 | 3.73 12,600 | 6,700 | 6,600 | 6,600 | 6,500 | 6,500 | 6,400 | 6,400 | 6,200 | | | |
| | 13,000 | | | | | | | | | 6,400 | | 6,300 |

Notes:

- Do not exceed trailer weight of 5,000 lbs. when towing with bumper only.
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
- Do not exceed the Maximum Loaded Trailer Weight listed.
- Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
- Transit calculated with SAE J2807® method.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. 15-passenger van.



2026 T-350HD Cutaway in Carbonized Gray Metallic.
(Available to order now, arriving fall 2025.)

Transit®

CUTAWAY

Automatic Transmission

| CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.) ⁴ | | | | | | | | | | | | | | |
|---|------------|-------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-------------|-------------------|
| REAR-WHEEL DRIVE | | | | | | | ALL-WHEEL DRIVE | | | | | | | |
| Engine | Axle Ratio | GCWR (lbs.) | 250/350 138" WB | 350HD DRW 138" WB | 250/350 156" WB | 350HD DRW 156" WB | 350 178" WB | 350HD DRW 178" WB | 250/350 138" WB | 350HD DRW 138" WB | 250/350 156" WB | 350HD DRW 156" WB | 350 178" WB | 350HD DRW 178" WB |
| 3.5L PFDI V6 | 4.10 | 12,000 | 6,500 | 6,400 | 6,400 | 6,200 | 6,100 | 6,000 | 6,300 | 6,100 | 6,200 | 6,000 | 5,900 | 5,700 |
| 3.5L EcoBoost® V6 | 3.73 | 12,600 | 7,100 | | 6,900 | | | | 6,800 | | 6,700 | | | |
| | | 13,000 | | 7,300 | | 7,100 | 7,100 | 6,900 | | 7,100 | | 6,900 | 6,800 | 6,700 |
| | | 15,000 | | 7,500 | | 7,500 | | 7,500 | | 7,500 | | 7,500 | | 7,500 |

CHASSIS CAB

Automatic Transmission

| CONVENTIONAL TOWING – MAXIMUM LOADED TRAILER WEIGHT (lbs.) ⁴ | | | | | | | | | | | | | | |
|---|------------|-------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-------------|-------------------|
| REAR-WHEEL DRIVE | | | | | | | ALL-WHEEL DRIVE | | | | | | | |
| Engine | Axle Ratio | GCWR (lbs.) | 250/350 138" WB | 350HD DRW 138" WB | 250/350 156" WB | 350HD DRW 156" WB | 350 178" WB | 350HD DRW 178" WB | 250/350 138" WB | 350HD DRW 138" WB | 250/350 156" WB | 350HD DRW 156" WB | 350 178" WB | 350HD DRW 178" WB |
| 3.5L PFDI V6 | 4.10 | 12,000 | 6,500 | 6,300 | 6,400 | 6,200 | 6,100 | 5,900 | 6,300 | 6,100 | 6,200/6,100 | 6,000 | 5,900 | 5,700 |
| 3.5L EcoBoost V6 | 3.73 | 12,600 | 7,000 | | 6,900 | | | | 6,800 | | 6,700 | | | |
| | | 13,000 | | 7,300 | | 7,100 | 7,000 | 6,900 | | 7,000 | | 6,900 | 6,800 | 6,600 |
| | | 15,000 | | 7,500 | | 7,500 | | 7,500 | | 7,500 | | 7,500 | | 7,500 |

Notes:

- Combined weight of vehicle and trailer cannot exceed listed GCWR.
- Do not exceed the Maximum Loaded Trailer Weight listed.
- Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduce by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Transit Van**/trailer combination is **55 sq. ft. for all applications** and for a **Transit Cutaway or Chassis Cab**/trailer combination is **72 sq. ft.* See Incomplete Vehicle Manual (IVM) for frontal area restriction details.** Exceeding these limitations may significantly reduce the performance of your towing vehicle.

*Base vehicle frontal area.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Limited Slip |
|-----------------|------------------|--------------|
| 3.73 | X73 | X7L |
| 4.10 | Not Available | X4L |

AVAILABLE TRAILER TOWING PACKAGE

| Equipment | Transit (53B) ¹ | Transit (53D) |
|--------------------------|----------------------------|---------------|
| 4-/7-Pin Connector | I ² | I |
| Trailer Wiring Harness | | I |
| Trailer Wiring Provision | I | I |
| Hitch Receiver | I | |
| Tow/Haul Mode | I | I |
| Trailer Sway Control | | I |

LEGEND
I = Equipment is included in the package

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

REQUIRED EQUIPMENT

For trailers over 5,000 lbs. – Heavy-Duty Trailer Tow Package (53B)

Your New Vehicle Limited Warranty may be voided if you tow without this.³

FACTORY-INSTALLED TRAILER HITCH RECEIVER OPTION

Included with Trailer Tow Package – Option Code 53B

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to each receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for this vehicle.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁵ | Max. Tongue Load (lbs.) |
|-----------------------|---|-------------------------|
| Transit Passenger Van | 4,500 | 450 |
| Transit Cargo Van | 6,900 | 690 |

1. Not available on Cutaway or Chassis Cab models. 2. Includes relay system for backup/B+/running lights. 3. See your Ford Dealer for limited warranty details. 4. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 5. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load.



2026 E-350 Cutaway DRW in Oxford White

E-Series® Cutaway and Stripped Chassis

MAXIMUM TRAILER WEIGHT = GCWR (lbs.)¹ – Vehicle GVW or 10,000 pounds, whichever is less

| Automatic Transmission | | CUTAWAY | | | | | | STRIPPED CHASSIS | | | | | |
|------------------------|------|----------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Engine | Axle | GVWR (lbs.) | E-350 SRW 138.0" WB | E-350 SRW 158.0" WB | E-350 DRW 138.0" WB | E-350 DRW 158.0" WB | E-350 DRW 176.0" WB | E-450 DRW 158.0" WB | E-450 DRW 176.0" WB | E-350 DRW 138.0" WB | E-350 DRW 158.0" WB | E-450 DRW 158.0" WB | E-450 DRW 176.0" WB |
| 7.3L V8 PFI | 4.10 | 10,050 | 18,500 | 18,500 | | | | | | 18,500 | | | |
| | | 11,500 | | | 18,500 | 18,500 | | | | | | | |
| | | 12,500 | | | | 18,500 | 18,500 | | | | 18,500 | | |
| | 4.56 | 10,050 | 18,500 | 18,500 | | | | | | | | | |
| | | 11,500 | | | 18,500 | | | | | 18,500 | | | |
| | | 12,500 | | | | 18,500 | 18,500 | | | | 18,500 | | |
| | | 14,000 | | | | | | 22,000 | 22,000 | | | 22,000 | 22,000 |
| | | 14,500 | | | | | | 22,000 | 22,000 | | | 22,000 | 22,000 |

Notes:

- Do not exceed trailer weight of 5,000 lbs. when towing with bumper only.
- Do not exceed the Maximum Loaded Trailer Weight.
- Combined weight of vehicle and trailer cannot exceed listed GCWR.

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **E-Series Cutaway/trailer** combination is **82 sq. ft.* for all applications**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

*Base vehicle frontal area.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Limited Slip |
|-------------------|------------------|--------------|
| 4.10 ² | 52/56 | E2/E6 |
| 4.56 | 58/83/85 | E8/F3/F5 |

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6; to obtain information in centimeters, multiply feet by 30.48.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. DRW models only.

SUVS & CARS



2026 Explorer Tremor® shown with available Ford accessories in Carbonized Gray Metallic. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Depending on the model, 2026 Ford SUVs can confidently tow a boat, trailer or camper along your trip.



2026 Expedition Platinum in extra-cost color Glacier Gray Metallic Tri-Coat. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Expedition®

| Automatic Transmission | | | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ^{1,2} | | | |
|------------------------|------------|-------------|---|--|----------------------|-------|
| Engine | Axle Ratio | GCWR (lbs.) | EXPEDITION (SWB) | | EXPEDITION MAX (LWB) | |
| | | | 4x2 | 4x4 | 4x2 | 4x4 |
| 3.5L EcoBoost® V6 | 3.31 | 12,000 | 6,000 | | | |
| | | 12,500 | | | 6,300 | |
| | 3.73 | 15,600 | | 9,200 ³ /9,300 ⁴ | | 9,000 |
| | | 15,900 | | 9,600 | | |

- Notes:**
- Trailer tongue load weight should be 10% of total loaded trailer weight. **Make sure vehicle payload (reduced by option weight) will accommodate trailer tongue load weight and weight of passengers and cargo added to towing vehicle.** Addition of trailer tongue load weight and weight of passengers and cargo cannot cause vehicle weights to exceed rear GAWR or GVWR. These ratings can be found on the vehicle Safety Compliance Certification Label.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Expedition calculated with SAE J2807® method.

HEAVY-DUTY TRAILER TOW⁶

| Equipment | Expedition (NOC) |
|--------------------------------|------------------|
| 4-/7-Pin Connector | S |
| Class IV Hitch Receiver | S |
| Upgraded Rear Axle | I |
| Upgraded Radiator | I |
| Tow/Haul Mode | S |
| 2-Speed Automatic 4WD | I |
| Trailer Brake Controller (TBC) | S |
| Trailer Sway Control | S |
| Pro Trailer Hitch Assist™ | S |
| 360-Degree Camera | S |
| Lane Keeping Alert | S |
| Pro Trailer Backup Assist™ 2.0 | S |

LEGEND

I = Equipment is included in the package

S = Equipment is standard on the vehicle

(NOC) = No Option Code assigned

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

REQUIRED EQUIPMENT

For trailers over 7,000 lbs. – Class IV Heavy-Duty Trailer Tow is now standard on 4x4 and requires aftermarket weight-distributing hitch

Your New Vehicle Limited Warranty may be voided if you tow without this.⁵

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Expedition/** trailer combination is **55 sq. ft. without Heavy-Duty Trailer Tow** and **60 sq. ft.⁶ with Heavy-Duty Trailer Tow**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Standard

See Hitch Receiver Weight Capacity chart for the weight-carrying and weight-distributing capacities of these hitch receivers. (These capacities also are shown on a label affixed to each receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁷ | Max. Tongue Load (lbs.) | Weight-Distributing Max. Trailer Capacity (lbs.) ⁷ | Max. Tongue Load (lbs.) |
|--------------------------|---|-------------------------|---|-------------------------|
| Expedition (SWB) 4x4 | 7,000 | 700 | 9,600 | 960 |
| Expedition MAX (LWB) 4x4 | 7,000 | 700 | 9,000 | 900 |

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip |
|-----------------|------------------|
| 3.31 | 15 |
| 3.73 | 2L |

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Max loaded trailer weight ratings over 7,000 lbs. require weight-distributing hitch for Expedition SWB and LWB models. When properly equipped, max towing varies based on cargo, vehicle configuration, accessories and number of passengers. 3. Equipped with 24" wheels. 4. Tremor® High Output engine. 5. See your Ford Dealer for limited warranty details. 6. 4x4 only. 7. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, or weight-distributing hitch and all other appropriate equipment to tow both the trailer and its cargo load.



2026 Explorer Platinum in Carbonized Gray Metallic. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Explorer®

| Automatic Transmission | | | | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ | |
|------------------------|-------------------|-------------|--------|---|-------|
| Engine | Axle Ratio | GCWR (lbs.) | | RWD | 4WD |
| 2.3L EcoBoost® I4 | 3.58 | 10,000 | 10,100 | 5,000 | 5,000 |
| | 3.58 ² | | 10,100 | | 5,000 |
| 3.0L EcoBoost V6 | 3.31 ³ | | 10,200 | | 5,000 |
| | 3.58 ² | | 10,800 | | 5,000 |
| | 3.58 ⁴ | 10,800 | 10,800 | 5,000 | 5,000 |
| 3.3L Ti-VCT V6 | 3.73 ³ | | 10,100 | | 5,000 |
| 3.3L HEV V6 | 3.73 ³ | | 10,500 | | 5,000 |

- Notes:**
- Certain states require electric trailer brakes for trailers over a specified weight. Be sure to check state regulations for this specified weight.
 - WARNING:** Do not tow a trailer fitted with electric trailer brakes unless your vehicle is fitted with a compatible aftermarket electronic trailer brake controller. Failure to follow this instruction could result in the loss of control of your vehicle, personal injury or death. For additional information and assistance, we recommend that you contact an authorized dealer.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Explorer calculated with SAE J2807® method.

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Explorer/trailer combination is 40 sq. ft. with Trailer Tow Package**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in kilometers, multiply miles by 1.6; to obtain information in square meters, multiply square feet by .09; to obtain information in centimeters, multiply inches by 2.54.

STANDARD TRAILER TOW PACKAGE

| Equipment | Explorer (NOC) |
|-------------------------------------|----------------|
| 7-Wire Harness & 4-/7-Pin Connector | I |
| Class III Hitch Receiver | I |
| Tow/Haul Mode | I |
| Trailer Sway Control | I |
| Lane Keeping Alert | I |

LEGEND
I = Equipment is included in the package
(NOC) = No Option Code assigned

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Included with standard Class III Trailer Tow Package

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacity for the hitch receiver shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for this vehicle.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁵ | Max. Tongue Load (lbs.) |
|------------------------|---|-------------------------|
| Explorer Gas or Hybrid | 5,000 ¹ | 500 |

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Limited Slip |
|-----------------|------------------|-----------------|
| 3.31 | 3A | |
| 3.58 | 3B | 3B ⁶ |
| 3.73 | 3C | |

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Tremor® model only. 3. Police Interceptor Utility only. 4. ST model only. 5. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load. 6. TORSEN® rear differential.



2026 Bronco Outer Banks 4-door in Wimbledon White with 60th Anniversary Package and Sasquatch® Package

Bronco®

10-Speed Automatic Transmission

| Engine | Axle Ratio | GCWR (lbs.) | | BASE | | BIG BEND® | OUTER BANKS® | BADLANDS® | | STROPPE EDITION | HERITAGE | RAPTOR® |
|-------------------|-------------------|-------------|--------|--------|--------|-----------|--------------|-----------|--------|-----------------|----------|--------------------|
| | | 2-Door | 4-Door | 2-Door | 4-Door | 4-Door | 4-Door | 2-Door | 4-Door | 4-Door | 4-Door | 4-Door |
| 2.3L EcoBoost® I4 | 3.73 | 8,500 | 8,980 | 3,500 | 3,500 | 3,500 | 3,500 | | | | | |
| | 4.46 | 8,800 | 8,980 | | | 3,500 | | 3,500 | | | | |
| | 4.70 ³ | 8,800 | 8,980 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | 3,500 | | 3,500 | |
| 2.7L EcoBoost V6 | 3.73 | | 8,980 | | | | 3,500 | | | | | |
| | 4.46 | 8,980 | 8,990 | | | | | | 3,500 | | | |
| | 4.70 ³ | 9,120 | 9,120 | | | | 3,500 | | 3,460 | 3,500 | 3,500 | |
| 3.0L EcoBoost V6 | 4.70 | | 10,650 | | | | | | | | | 4,500 ⁴ |

7-Speed Manual Transmission

| | | | | | | | | | | | | |
|------------------|-------------------|-------|-------|-------|--|-------|--|-------|--|-------|--|--|
| 2.3L EcoBoost I4 | 3.73 | 8,500 | | 3,500 | | | | | | | | |
| | 4.46 | | 8,980 | | | 3,500 | | | | | | |
| | 4.70 ³ | 8,980 | | | | 3,500 | | 3,500 | | 3,500 | | |

- Notes:**
- Do not exceed the Maximum Loaded Trailer Weight listed.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Bronco calculated with SAE J2807® method.

REQUIRED EQUIPMENT

For trailers over 2,000 lbs. – dealer-installed towing equipment

Your New Vehicle Limited Warranty may be voided if you tow without this.⁵

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Bronco**/trailer combination is **30 sq. ft. with dealer-installed towing equipment, Tow Rating of 3,500 lbs. or less and 40 sq. ft. with Raptor Tow Package 2**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Trailer Tow Prep Package included on all models, excluding Raptor. Requires dealer-installed OEM trailer and hitch receiver option. 3. Sasquatch® Package (765). 4. Raptor model includes Tow Package 2 as standard equipment. 5. See your Ford Dealer for limited warranty details. 6. Dealer-installed equipment. 7. Included on Big Bend® and above. 8. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load.

AVAILABLE TRAILER TOW PACKAGE

| Equipment | Bronco (NOC) | Bronco Raptor (NOC) |
|-------------------------------------|----------------|---------------------|
| 7-Wire Harness & 4-/7-Pin Connector | I ⁶ | S |
| Trailer Module | I ⁶ | S |
| Hitch Receiver | I ⁶ | S |
| Aux. Auto Trans. Oil Cooler | | S |
| Tow/Haul Mode | | S |
| Tow Hooks Front | S | S |
| Trailer Sway Control | S | S |
| 360-Degree Camera | | S |
| Lane Keeping Alert | I ⁷ | S |

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

LEGEND

I = Equipment is included in the package
S = Equipment is standard on the vehicle
(NOC) = No Option Code assigned

DEALER-INSTALLED OEM TRAILER HITCH RECEIVER OPTION

Included with dealer-installed towing equipment

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁸ | Max. Tongue Load (lbs.) |
|----------------|---|-------------------------|
| Bronco | 3,500 | 350 |
| Bronco Raptor® | 4,500 | 450 |

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip | Electronic Locking |
|-----------------|------------------|--------------------|
| 3.73 | 73 | Not Available |
| 4.46 | 46 | 4L |
| 4.70 | Not Available | 7L |



2026 Bronco Sport Badlands® model with optional equipment in extra-cost option Ruby Red Metallic Tinted Clearcoat

Bronco Sport®

Automatic Transmission

| Engine | Final Drive Ratio | GCWR (lbs.) 4x4 | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ |
|-------------------|-------------------|-----------------|---|
| 1.5L EcoBoost® I3 | 3.80 | 6,100 | 2,200 ^{2,3} |
| | 3.80 | 6,320 | 2,200 ^{2,4} |
| 2.0L EcoBoost I4 | 3.80 | 6,990 | 2,700 ^{2,5} |

- Notes:**
- Certain states require electric trailer brakes for trailers over a specified weight. Be sure to check state regulations for this specified weight. **WARNING:** Do not tow a trailer fitted with electric trailer brakes unless your vehicle is fitted with a compatible aftermarket electronic trailer brake controller. Failure to follow this instruction could result in the loss of control of your vehicle, personal injury or death. For additional information and assistance, we recommend that you contact an authorized dealer.
 - Combined weight of vehicle and trailer cannot exceed listed GCWR.
 - Do not exceed the Maximum Loaded Trailer Weight listed.
 - Bronco Sport calculated with SAE J2807® method.

REQUIRED EQUIPMENT

For trailers over 1,500 lbs. – Class II Trailer Tow Package

Your New Vehicle Limited Warranty may be voided if you tow without this.⁶

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Bronco Sport**/trailer combination is **20 sq. ft. without Class II Trailer Tow Package** and **30 sq. ft. with Class II Trailer Tow Package**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires Class II Trailer Tow Package. 3. Big Bend® Black Diamond Off-Road Package. 4. Sasquatch® Outer Banks Package only. 5. Badlands and Badlands Sasquatch Package. 6. See your Ford Dealer for limited warranty details. 7. Standard on Badlands. Included with either the available Big Bend Black Diamond Off-Road Package or the available Outer Banks Sasquatch Package. 8. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load.

CLASS II TRAILER TOW PACKAGE⁷

| Equipment | Bronco Sport (NOC) |
|--------------------------------|--------------------|
| Trailer Wiring Harness (4-Pin) | I |
| Hitch Receiver | I |
| Recovery Hooks Front & Back | I |
| Trailer Sway Control | I |
| Full Size Spare Tire | I |

LEGEND
I = Equipment is included in the package
(NOC) = No Option Code assigned

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Included with Class II Trailer Tow Package

See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁸ | Max. Tongue Load (lbs.) |
|-----------------------|---|-------------------------|
| Bronco Sport | 2,200 | 220 |
| Bronco Sport Badlands | 2,700 | 270 |



2026 Escape Platinum in Carbonized Gray Metallic. When properly equipped. Max towing varies based on cargo, vehicle configuration, accessories, and number of passengers.

Escape®

Automatic Transmission

| Engine | Final Drive Ratio | GCWR (lbs.) | | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ |
|------------------------|-------------------|-------------|-------|---|
| | | FWD | AWD | |
| 2.5L I4 Hybrid | 2.91 | | 5,624 | 1,500 ² |
| 2.5L I4 Plug-in Hybrid | 2.91 | 5,785 | | 1,500 ² |
| 1.5L EcoBoost® I3 | 3.81 | 5,635 | | 2,000 ³ |
| | | | 5,790 | 2,000 ³ |
| 2.0L EcoBoost I4 | 3.47 | 7,440 | | 2,000 ³ /3,500 ⁴ |

Notes: • Certain states require electric trailer brakes for trailers over a specified weight. Be sure to check state regulations for this specified weight.
WARNING: Do not tow a trailer fitted with electric trailer brakes unless your vehicle is fitted with a compatible aftermarket electronic trailer brake controller. Failure to follow this instruction could result in the loss of control of your vehicle, personal injury or death. For additional information and assistance, we recommend that you contact an authorized dealer.
• Combined weight of vehicle and trailer cannot exceed listed GCWR.
• Do not exceed the Maximum Loaded Trailer Weight listed.
• Escape calculated with SAE J2807® method.

REQUIRED EQUIPMENT

For trailers over 2,000 pounds – Class II Trailer Tow Package (536)
Your New Vehicle Limited Warranty may be voided if you tow without this.⁵

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.
The maximum trailer frontal area that must be considered for a **Escape/trailer combination is 20 sq. ft. without Class II Trailer Tow Package and 30 sq. ft. with Class II Trailer Tow Package.** Exceeding this limitation may significantly reduce the performance of your towing vehicle.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Requires Class II Trailer Tow Package (536) available on ST-Line Select, ST-Line Elite and Platinum 2.0L EcoBoost and Hybrid or Plug-in Hybrid models. 3. Escape does not offer factory-installed towing equipment for this application; only available as dealer accessory. 4. Requires Class II Trailer Tow Package (536). 5. See your Ford Dealer for limited warranty details. 6. Available with 2.0L EcoBoost I4 or 2.5L I4 Hybrid/Plug-in Hybrid (ST-Line Select, ST-Line Elite, Platinum and PHEV) only. 7. Hitch receivers do not include a hitch ball or ball mounting. You are responsible for obtaining the proper hitch ball, ball mounting, and other appropriate equipment to tow both the trailer and its cargo load. 8. When properly equipped.

EMISSIONS DISCLOSURE

The 2026 Ford Escape is not certified for emissions requirements with the California Air Resources Board, and therefore is not available for purchase for customers intending to register their vehicle in states that have adopted California's certification requirements for 2026 model year, specifically California, Massachusetts, Oregon, New York, Washington, and Vermont.

AVAILABLE TRAILER TOW PACKAGE

| Equipment | Escape ⁴ (536) | LEGEND |
|--------------------------------|---------------------------|--|
| Trailer Wiring Harness (4-Pin) | I | I = Equipment is included in the package S = Equipment is standard on the vehicle |
| Hitch Receiver | I | |
| Auto Trans. Oil Cooler | I | |
| Trailer Sway Control | I | |
| Lane Keeping Alert | S | |

Note: Content may vary depending on model, trim and/or powertrain. See your Ford Dealer for specific content information for all vehicles that will be used for towing to help ensure easy, proper connection of trailer lights.

FACTORY-INSTALLED TRAILER HITCH RECEIVER

Included with Class II Trailer Tow Package – Option Code 536
See Hitch Receiver Weight Capacity chart for the weight-carrying capacity of this hitch receiver. (This capacity also is shown on a label affixed to the receiver.)

HITCH RECEIVER WEIGHT CAPACITY

The maximum weight capacities for the hitch receivers shown below may exceed the maximum loaded trailer weight for the vehicle specified. Refer to the Trailer Towing Selector chart for Maximum Loaded Trailer Weight for these vehicles.

| | Weight-Carrying Max. Trailer Capacity (lbs.) ⁷ | Max. Tongue Load (lbs.) |
|------------------------------|---|-------------------------|
| Escape Hybrid/Plug-in Hybrid | 1,500 ⁸ | 150 ⁸ |
| Escape 2.0L | 3,500 ⁴ | 350 ⁴ |



2026 Mustang EcoBoost with available Bronze Appearance Package in Carbonized Gray Metallic.

Mustang^{®2,3}

Automatic Transmission

| Engine | Axle Configuration | MAXIMUM LOADED TRAILER WEIGHT (lbs.) ¹ |
|-------------------------------|--------------------|---|
| 2.3L EcoBoost [®] I4 | RWD | 1,000 |
| 5.0L V8 GT | RWD | 1,000 |

Manual Transmission

| | | |
|------------|-----|-------|
| 5.0L V8 GT | RWD | 1,000 |
|------------|-----|-------|

Notes: • Do not exceed the Maximum Loaded Trailer Weight listed.
• Mustang calculated with SAE J2807[®] method.

FRONTAL AREA LIMITATION

Frontal Area is the total area in square feet that a moving vehicle and trailer exposes to air resistance.

The maximum trailer frontal area that must be considered for a **Mustang**/trailer combination is **12 sq. ft.** for **all applications**. Exceeding this limitation may significantly reduce the performance of your towing vehicle.

1. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 2. Mustang does not offer factory-installed trailer tow equipment for this application; only available as aftermarket accessory. 3. Mustang Dark Horse is not rated to tow a trailer.

MOTORHOMES & STRIPPED CHASSIS



Class A Motorhome Chassis

FEATURES

Six wheelbase choices:
178/190/208/228/242/252-inch

Four Gross Vehicle Weight Ratings (GVWRs): 18,000/22,000/24,000/26,000 lbs.

Three Gross Combination Weight Ratings (GCWRs): 23,000/26,000/30,000 lbs. for excellent towing capabilities (6,000 lbs. maximum trailer weight at 24,000-lb. GVWR)

7.3L OHV V8 gas engine (335 hp/468 lb.-ft. of torque¹)

6-speed automatic transmission with tow/haul mode

Power 4-wheel disc Anti-lock Brake System (ABS) for consistent, responsive braking performance

Standard traction control for better vehicle handling when braking

19.5-inch steel wheels and tires included with 18,000-lb. GVWR; 19.5-inch wheels and tires optional with 22,000-lb. GVWR

22.5-inch aluminum wheels and tires included with 22,000/24,000/26,000-lb. GVWR

81-inch front tread width (79-inch on 22,000/24,000/26,000-lb. GVWRs)

Large-diameter stabilizer bars, front and rear, for ride control

Heavy-duty front track bar enhances ride and handling on all models (optional on 16,000-lb. GVWR)

Designed to accommodate wide-body and slide-out type motorhomes

7-wire trailer wiring harness with relays, blunt cut and labeled

Hill start assist

Embedded modem

Standard electronic stability control

High-capacity front axle system

80-gallon fuel tank, aft axle

Heavy-duty shock absorbers

Air Conditioning Prep Package

CNG/LPG Gaseous Fuel Prep Package available

Available Driver-Assist Technology Package

SUPER DUTY® CLASS A MOTORHOME CHASSIS

| GVWR | GCWR | Trailer Weight ² |
|-------------|-------------|-----------------------------|
| 18,000 lbs. | 23,000 lbs. | 5,000 lbs. |
| 22,000 lbs. | 26,000 lbs. | 4,000 lbs. |
| 24,000 lbs. | 30,000 lbs. | 6,000 lbs. |
| 26,000 lbs. | 30,000 lbs. | 4,000 lbs. |

Notes:

- Towing vehicle's braking system is rated for operation at GVWR – NOT GCWR. See page 3 for more details.
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
- Do not exceed the Maximum Loaded Trailer Weight listed.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip |
|-----------------|------------------|
| 4.88 | 48 |
| 5.86 | 58 |
| 6.14 | 61 |

Metric Conversion – To obtain information in kilograms, multiply pounds by .45; to obtain information in centimeters, multiply inches by 2.54; to obtain information in liters, multiply gallons by 3.8; to obtain information in kilometers, multiply miles by 1.6.

1. Horsepower and torque ratings determined based upon testing requirements prescribed in SAE J1349. Your results may vary. Horsepower and torque are independent attributes and may not be achieved simultaneously. 2. Maximum towing capabilities are for properly equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer.

For additional information on Class A Motorhome Chassis, see your Ford Dealer.



Commercial Stripped Chassis

FEATURES

Five wheelbase choices:
158/168¹/178/190/208-inch

Three Gross Vehicle Weight Ratings (GVWRs):
16,000/19,500/22,000 lbs.

Four Gross Combination Weight Ratings (GCWRs):
23,000/26,000/27,200¹/29,700¹ lbs.

7,700 lbs. maximum trailer weight with 19,500-lb. or 22,000-lb. GVWR with optional Parcel Delivery Package (7,000 lbs. maximum trailer weight at 16,000-lb. GVWR)

7.3L OHV V8 gas engine (335 hp/468 lb.-ft. of torque²)

6-speed automatic transmission

Power 4-wheel disc Anti-lock Brake System (ABS) for consistent, responsive braking performance

Standard electronic stability control

19.5-inch steel wheels and tires

7-wire trailer wiring harness with relays, blunt cut and labeled

Fleet telematics modem

Front and rear stabilizer bars

40-gallon fuel tank capacity, aft of axle

Galvanized frame available on 208-inch wheelbase with 19,500-lb. or 22,000-lb. GVWR and included with Parcel Delivery Package

Driver's steering column positioned for easy ingress and egress

Low load floor height for ease of cargo loading

Heavy-duty Sachs shock absorbers

Traction control

Hill start assist

Fleet telematics modem

Air Conditioning Prep Packages available

Driver-Assist Technology Package available

CNG/LPG Gaseous Fuel Prep Package available



SUPER DUTY® STRIPPED CHASSIS

| GVWR | GCWR | Trailer Weight ^{3,4} |
|-------------|-------------|-------------------------------|
| 16,000 lbs. | 23,000 lbs. | 7,000 lbs. |
| 19,500 lbs. | 26,000 lbs. | 6,500 lbs. |
| 19,500 lbs. | 27,200 lbs. | 7,700 lbs. ⁵ |
| 22,000 lbs. | 26,000 lbs. | 4,000 lbs. |
| 22,000 lbs. | 29,700 lbs. | 7,700 lbs. ⁵ |

Notes:

- Towing vehicle's braking system is rated for operation at GVWR – NOT GCWR. See page 3 for more details.
- Combined weight of vehicle and trailer cannot exceed listed GCWR.
- Do not exceed the Maximum Loaded Trailer Weight listed.

REAR AXLE RATIO CODES

If you do not know the axle ratio of your vehicle, check its Safety Compliance Certification Label (located on the left front door lock facing or the door latch post pillar). Below the bar code, you will see the word AXLE and a two-digit code. Use the chart to find the axle ratio that corresponds to that code.

| Rear Axle Ratio | Non-Limited Slip |
|-----------------|------------------|
| 4.30 | 43 |
| 4.88 | 48 |
| 5.38 | 53 |

1. Only available with Parcel Delivery Package (59P). 2. Horsepower and torque ratings determined based upon testing requirements prescribed in SAE J1349. Your results may vary. Horsepower and torque are independent attributes and may not be achieved simultaneously. 3. Maximum towing capabilities require Parcel Delivery Package (59P) for Commercial Stripped Chassis. For additional information on Commercial Stripped Chassis, see your Ford Dealer. 4. Maximum towing capabilities are for properly-equipped vehicles with required equipment and a 150-lb. driver and passenger and vary based on cargo, vehicle configuration, accessories, option content and number of passengers. For additional information, see your Ford Dealer. 5. Requires Parcel Delivery Package option.



2026 E-350 Cutaway
DRW in Oxford White

E-Series® Class C Motorhome Chassis

FEATURES

Three wheelbase choices:
138/158/176-inch

Up to 14,500-lb. GVWR and
22,000-lb. GCWR¹

7.3L V8 engine

6-speed automatic transmission

Twin-I-Beam independent front
suspension (with caster/camber
adjustment), front stabilizer
bar and gas-pressurized shock
absorbers contribute to a
smooth, comfortable ride

Driver and front passenger
airbags²

Steel ladder-type truck frame
with seven cross members

Out-front engine design provides
spacious cab with access to
"living area" and ease of ingress/
egress

40-gallon fuel tank (E-350™;
optional on E-450™); 55-gallon
fuel tank (E-450; optional on
E-350 DRW with 11,500- or
12,500-lb. GVWR)

Standard electronic stability
control

Standard Automatic Emergency
Braking

Comfortable driver position with
updated ergonomic instrument
panel and controls

Available Driver-Assist
Technology Package

Traction control

Standard hill start assist

Available dual alternators –
240-amp/157-amp

CNG/Propane Gaseous Fuel Prep
Package available

MOTORHOME CUSTOMER CARE

Customer Assistance Center

This 24-hour, seven-days-a-week hotline was designed to
serve both motorhome owners and RV dealers. By simply
calling 1-800-444-3311, the caller has access to:

The nearest appropriate service location

Assistance in scheduling a service appointment

Service assistance for motorhome customers and RV
dealers in resolving Ford chassis-related concerns

In-Dealership Service Support

Over 1,900 Ford dealerships in the U.S. and Canada provide
Class C motorhome service support

Certified service technicians backed by computerized
diagnostics and national technical hotline support

Verification of available owner notification and recall
information affecting motorhomes

1. 22,000-lb. GCWR requires electrical connector heat shield on all E-450 Cutaways.

2. Always wear your safety belt.

For additional information, see your Ford Dealer.



2026 T-350HD AWD LWB-EL DRW
in Oxford White

Transit® Class C Motorhome Chassis

FEATURES

Three wheelbase choices: 138/156/178-inch

Up to 11,000-lb. GVWR¹ and 15,000-lb. GCWR¹

Two engine choices: 3.5L PFDI V6 gas and 3.5L EcoBoost® V6

10-speed automatic transmission with SelectShift®

Available All-Wheel-Drive (AWD)

Ford Co-Pilot360® Technologies²

12" SYNC 4 touchscreen rear view camera kit

4-way manual swivel driver and passenger seats

Driver and front passenger airbags³

4-wheel disc Anti-lock Brake System (ABS)

AdvanceTrac® with Roll Stability Control™ (RSC®)

Independent MacPherson strut front suspension and stabilizer bar

Leaf spring rear suspension with heavy-duty shock absorbers

25-gallon fuel tank capacity; 31-gallon available

Frame rail extension adapters

Available Aux. Fuse Panel

Available Dual AGM batteries

Available modified Vehicle Wiring System

Available Trailer Brake Controller (TBC)

Available Tow/Haul Mode with Trailer Wiring Provisions

Available dual alternators – 240-amp/157-amp

¹ Only available with 3.5L EcoBoost. ² Driver-assist features are supplemental and do not replace the driver's attention, judgment and need to control the vehicle. It does not replace safe driving. See Owner's Manual for details and limitations. ³ Always wear your safety belt.

For additional information, see your Ford Dealer.

TOWING A FORD VEHICLE

Four-Wheel-Down Towing

Many motorhome owners prefer the practicality of having another vehicle along when they travel. In fact, towing another vehicle behind the motorhome has become more and more popular in recent years. Furthermore, many of those who want to tow another vehicle prefer one that can be easily towed without a dolly or trailer.

The chart on this page shows which car, truck and SUV models can be towed with all four wheels down. For safe operation, towed vehicles (or dollies or trailers carrying them) should be equipped with a separate functional brake system. See pages 3 and 9 for additional brake information.

Note: Some aftermarket camper centers offer kits which may allow vehicles with automatic transmissions to be flat-towed. (Four-Wheel-Down Towing is sometimes referred to as "Flat Tow" or "Flat Towing.") Check your new vehicle Warranty Guide, as this could void the warranty of your vehicle.

FOUR-WHEEL-DOWN AVAILABILITY

| 2026 FORD CARS | Automatic Transmission | Manual Transmission |
|--|------------------------|---------------------|
| Mustang® – All Models | No | No |
| 2026 FORD ELECTRIC VEHICLES | | |
| Mustang Mach-E® | No | N/A |
| E-Transit™ | No | N/A |
| F-150® Lightning® | No | N/A |
| 2026 FORD SUVS | | |
| Bronco Sport® | No | N/A |
| Escape® | No | N/A |
| Escape Hybrid | Yes ^{1,2,3} | N/A |
| Escape Plug-in Hybrid | Yes ^{1,2,3} | N/A |
| Bronco® | Yes ^{3,4} | Yes ⁴ |
| Explorer® | No | N/A |
| Expedition®/Expedition MAX 4x2 | No | N/A |
| Expedition/Expedition MAX 4x4 | Yes ^{4,5} | N/A |
| 2026 FORD TRUCKS | | |
| Maverick® | No | N/A |
| Maverick Hybrid | Yes ^{1,2,3} | N/A |
| Maverick Hybrid 4x4 | Yes ^{1,2,3} | N/A |
| Ranger® 4x2 | No | N/A |
| Ranger 4x4 | Yes ⁴ | N/A |
| F-150 Pickup 4x2 | No | N/A |
| F-150 Pickup 4x4 | Yes ⁴ | N/A |
| F-150 Raptor Pickup 4x4 | Yes ⁴ | N/A |
| F-250®/350®/450®/550®/600® Super Duty® 4x2 | No | N/A |
| F-250/350/450/550/600 Super Duty 4x4 | Yes ⁴ | N/A |
| Transit® | No | N/A |
| E-Series® Cutaway/Stripped Chassis | No | N/A |

1. Maximum speed with hybrid transmission is 70 mph. **2.** Select "Stay In Neutral" mode – refer to Owner's Manual transmission and towing sections to follow procedures. **3.** Start the engine and allow it to run for a few minutes at the beginning of each day and every six (6) hours or fewer, thereafter. With the engine running and your foot on the brake, shift into drive (D) and then into reverse (R) before shifting back into neutral (N). **4.** Place the transfer case in the neutral tow position to engage the four-wheel-down towing feature – refer to Owner's Manual to follow additional steps. **5.** Requires 2-speed transfer case.

N/A – Not Applicable.

INDIVIDUAL VEHICLES HAVE DIFFERENT RESTRICTIONS AND TOWING PROCEDURES. REFER TO THE VEHICLE OWNER'S MANUAL OR CONTACT YOUR FORD DEALER FOR COMPLETE DETAILS.

Tow-Dolly Flexibility

Tow-dollies allow you to tow your vehicle behind a RV or motorhome if you are unable to four-wheel-down your car, SUV or truck. Tow-dollies work by elevating the vehicle's front drive wheels and resting them securely on the dolly while the back two wheels stay on the ground. They are not as long as the traditional trailers, which helps make turning corners easier.



Before using the tow-dolly, read the manufacturer's instructions that came with the tow-dolly before towing, loading or unloading the dolly.

- Attach the appropriate trailer hitch and drawbar hardware to the vehicle for the tow-dolly
- Attach the tow-dolly to the drawbar. The tow-dolly should be completely secure and on level ground before the vehicle to be towed is put on or taken off the tow-dolly
- Drive the vehicle onto the tow-dolly with its front wheels
- Secure the vehicle to the tow-dolly according to the manufacturer's instructions
- Follow the instructions for attaching and connecting the auxiliary lights to the back of the vehicle being towed
- Test the auxiliary lights to make sure that the turn signals, stop lamps and running lights work properly

TOW-DOLLY AVAILABILITY

| 2026 FORD CARS | FWD | RWD | AWD/4WD ¹ |
|----------------|-----|-----|----------------------|
| Mustang® | N/A | No | N/A |

| 2026 FORD ELECTRIC VEHICLES | | | |
|-----------------------------|-----|-----|-----|
| Mustang Mach-E® | N/A | No | No |
| E-Transit™ | N/A | No | N/A |
| F-150® Lightning® | N/A | N/A | No |

| 2026 FORD SUVs | | | |
|-----------------------|-----|-----|-----|
| Bronco Sport® | N/A | N/A | No |
| Escape® | Yes | N/A | No |
| Escape Hybrid | Yes | N/A | No |
| Escape Plug-in Hybrid | Yes | N/A | N/A |
| Bronco® | N/A | N/A | No |
| Explorer® | N/A | No | No |
| Expedition® | N/A | No | No |

| 2026 FORD TRUCKS | | | |
|------------------------------------|-----|-----|-----|
| Maverick® | Yes | N/A | No |
| Maverick Hybrid | Yes | N/A | N/A |
| Ranger® | N/A | No | No |
| F-150® Pickup | N/A | No | No |
| Super Duty® Pickup/Chassis Cab | N/A | No | No |
| Transit® | N/A | No | No |
| E-Series® Cutaway/Stripped Chassis | N/A | No | N/A |

1. AWD/4WD vehicles cannot be towed with 2 wheels lifted off the ground.
N/A – Not Applicable.

INDIVIDUAL VEHICLES HAVE DIFFERENT RESTRICTIONS AND TOWING PROCEDURES. REFER TO THE VEHICLE OWNER'S MANUAL OR CONTACT YOUR FORD DEALER FOR COMPLETE DETAILS.



**For the latest RV & Trailer Towing information,
check out Ford Pro I Manuals & Certificates.**

Photography, illustrations and information presented herein were correct when approved for publishing. Ford Motor Company reserves the right to discontinue or change at any time the specifications or designs without incurring obligation. Some features shown or described are optional at extra cost. Some options are required in combination with other options. Consult your Ford Dealer for the latest, most complete information on models, features, prices and availability.

Many of the recreational vehicles shown in this brochure are modified or manufactured by companies other than Ford Motor Company. Ford assumes no responsibility for such modifications or manufacturing.